



# Bimetal Operating Principle

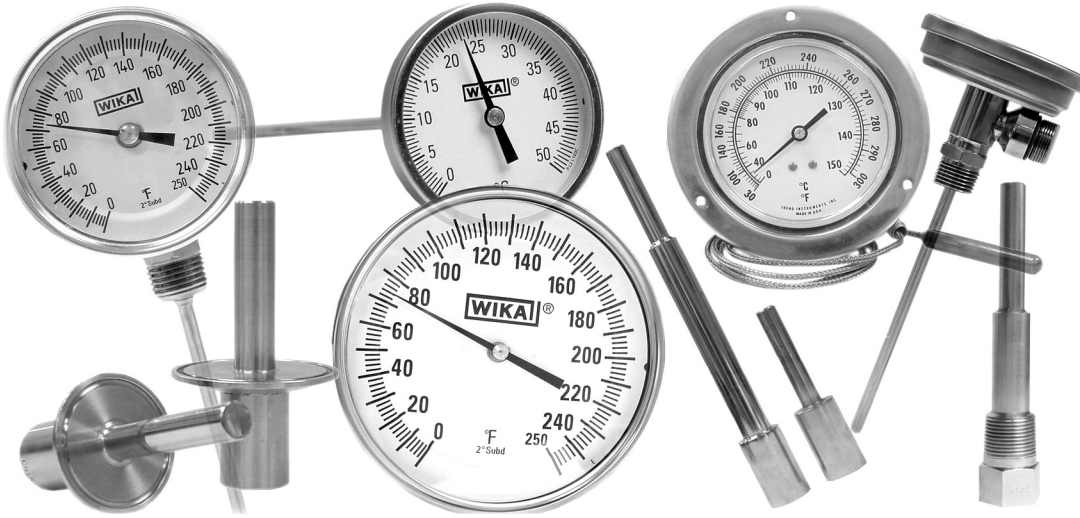

The temperature is measured with a bimetal system inside the thermometer stem. The bimetal system consists of two metal strips bonded together that have different expansion coefficients. Therefore, one strip will expand faster than the other causing the bimetal strip to curl in proportion to its temperature. The bimetal system is helically wound and heat treated for long term stability. Temperature variations cause the bimetal strip to unwind or wind tighter, which in turn rotates the pointer.

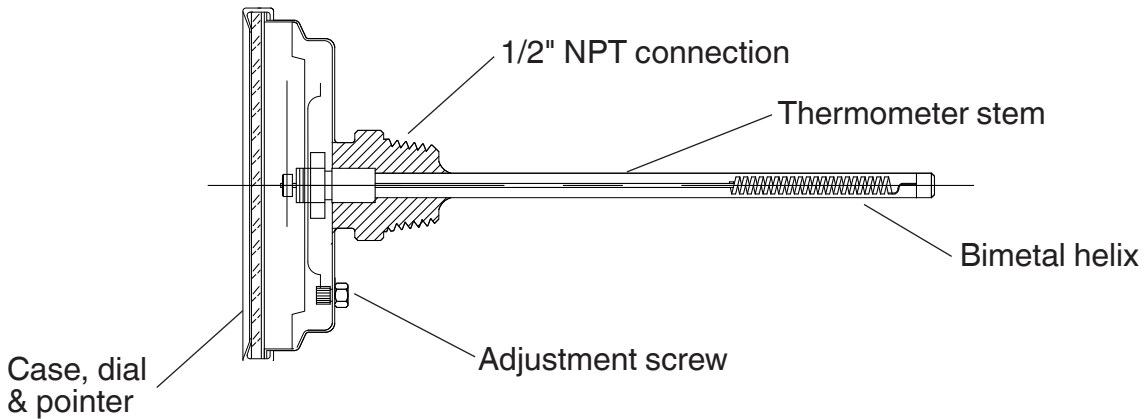

## Bimetal Thermometers General Specifications

**Case:** Sturdy, corrosion resistant series 304 SS case and bezel. Designed and constructed to provide a hermetic seal (IP65, NEMA 4X) which prevents crystal fogging and damage caused by moisture to the working components. Install thermometer so the maximum temperature case is kept below 200°F at all times.

**Dial:** Anti-parallax heavy gauge aluminum with white matte finish to reduce glare. Dished form with Celsius on lower inner plane and Fahrenheit on raised outer plane offers accurate indication of both scales (if equipped with dual scales).

**External Reset:** (comes standard on all process grade bimetal thermometers) A slotted-hex adjustment head offers screwdriver or wrench use to field calibrate the thermometer. This feature allows maximum accuracy at a selected area of temperature range. O-ring gasket prevents leakage and maintains weather tight seal. Note: use well-agitated bath and accurate test thermometer when making any adjustment.

**Standards:** WIKA manufactures ASME B40.3 bimetal thermometers, which meet or exceed the standard issued by the American Society of Mechanical Engineers.

**Window:** Optically clear, strong glass, gasketed to maintain weather tight integrity. Acrylic and Lexan® windows are available as an option but not recommended for case temperature exceeding 200°F maximum (150°F for plastic/acrylic window).

**Pointer:** Balanced, lightweight aluminum with matte black finish.

**Stem:** 304 SS welded at tip and case connector to prevent leakage. ¼" diameter is standard, ⅜" is available. Stem lengths to 72" are available, as well as 316 SS stem and connector assemblies.

**Immersion:** For accurate temperature readings, immerse the stem a minimum of 2" in agitated liquid or 4" in moving air or gas.

**Over Range:** Temporary over or under range of 50% of scale up to 500°F or 260°C will not affect the instrument's accuracy.

**Bimetal Element:** An extremely responsive temperature sensing helix which has been carefully sized and tested, heat treated and aged to relieve inherent stresses and ensure continued accuracy.

**Accuracy:** Guaranteed to be accurate to within 1% of full scale (Grade A per ASME B40.3). Calibration is to standards traceable to the National Institute of Standards and Technology.

**Hermetic Seal:** Hermetically sealed per ASME B40.3. Guaranteed not to fog up (IP65, NEMA 4X).

**Dampening:** Inert gel to minimize pointer oscillation.

**7-Year Warranty:** WIKA extends a 7-year warranty on standard types 30, 31, 50, 51, 32 and 52. Such units are guaranteed to be free from defects in material and workmanship under normal use and service. For all other models, WIKA extends a 1-year warranty. Complete details available upon request.

**Filled Thermometer Policy:** Silicone filling is available on selected types for ranges between -40°F and 500°F. WIKA does not recommend use of filled instruments for continual use at operating temperatures above of 400°F (204°C) or below -100°F (-70°C). Under no circumstances will an instrument warranty apply or will WIKA assume any liability for use above these temperatures. Per ASME B40.3, plain glass windows must not be used on filled thermometers due to expansion of fill fluid and potential lens breakage. Note: for stem lengths over 24"- consult factory.

**Thermowells are recommended for pressure, corrosive, fluid or high velocity applications.**



Mechanical Temperature > Bimetal Thermometers > TI.1005

## Type TI.1005

Type TI.1005 is a bimetal dial thermometer requiring no power to deliver its quick, accurate readings. The 1" dial is easy to read. Stem length is 5". Thermometer includes a pocket case which can be used to hold the stem.



### Standard Features

<b>Scale:</b>	As indicated	<b>Reset:</b>	Yes; 7/16" hex hub adjustment
<b>Range:</b>	(°F); As indicated	<b>Stem diameter:</b>	.142"
<b>Window:</b>	Lexan	<b>Accuracy:</b>	±1% of full range span (ASME B40.3 - Grade A)
<b>Connection:</b>	Plain, 7/16" hex hub adjustment		

Type	TI.1005
Connection	Plain
Dial Size	1"
Stem Length	5"
Scale	°F
-40/160 °F	<b>1005219D</b>
0-220 °F	<b>1005223D</b>
50/550 °F	<b>1005216D</b>

Stock items shown in blue print.

Mechanical Temperature > Bimetal Thermometers > TI.ST

## Type TI.ST

WIKA dual magnet surface mount thermometers are problem solvers. Type TI.ST is an inexpensive, easy-to-use, accurate surface mounting thermometer, which attaches to any ferrous metal surface, giving unlimited localized temperature indication. The specially-designed bimetal sensing element and housing provides quick readings with an accuracy of ±2% of full scale range. These 2" dial thermometers feature steel cases, glass windows, polished aluminum dials with very legible graduations and are available in ranges listed below. WIKA dual magnet mount surface thermometers are the ideal choice for ovens, boilers, process lines, motors, generators, or anywhere a temporary or permanent surface temperature is to be measured.



### Standard Features

<b>Dial:</b>	2"
<b>Depth:</b>	1/2"
<b>Accuracy:</b>	±2% of full range span
<b>Reset:</b>	No

Type	TI.ST
Connection	Surface
Dial Size	2"
Stem Length	N/A
Scale	°F or °C
0/250 °F	<b>ST206MW</b>
0/500 °F	<b>ST228MW</b>
-20/120 °C	<b>ST106MW</b>
-70/70 °C	<b>ST101MW</b>

Stock items shown in blue print.

Mechanical Temperature > Bimetal Thermometers > TI.20

## Type TI.20

Type TI.20 thermometers are high-quality, economical thermometers designed for limited space and OEM applications. All type TI.20 bimetal thermometers carry a 1-year warranty.



### Standard Features

<b>Case:</b>	304 SS	<b>Over Range:</b>	Temporary over or under range tolerance of 50% of scale up to 500°F (260°C)
<b>Dial:</b>	Anti-parallax or flat dial, heavy gauge aluminum with white matte finish	<b>Accuracy:</b>	±1% of full range span per Grade A, ASME B40.3
<b>Window:</b>	Fully gasketed glass; Lexan® available	<b>Connection:</b>	¼" NPT, 304 SS
<b>Reset:</b>	N/A	<b>Stem Lengths:</b>	2½" to 24"
<b>Hermetic Seal:</b>	Per ASME B40.3	<b>Shipping Weight:</b>	Stem length 2½" - 9" = 6oz.** (**weights of individual thermometers)
<b>Stem:</b>	¼" diameter; 304 SS, TIG welded at tip and case connection		
<b>Dampening:</b>	Inert gel to minimize pointer oscillation		

Type	TI.20
Connection	1/4" NPT Back
Dial Size	2"
Stem Length	2½"
Scale	°F & °C
0/250 °F & °C	20025D006G2

Stock items shown in **blue** print.


#### Notes:

1. Stem lengths are available from 2½" to 24".
2. Ranges from -100°F (-70°C) to 1,000°F (550°C) are available.
3. Silicone fill not available.
4. Thermowells are recommended for pressure, corrosive, fluid or high velocity applications.

Mechanical Temperature > Bimetal Thermometers > TI.T20 / TI.T17

## Type TI.T20 / TI.T17

Count on WIKA laboratory thin stem thermometers to deliver fast, extremely accurate readings. These thermometers include beaker clip and reset feature on plain connections only. No external adjustment available on threaded connections. All type TI.T20 bimetal thermometers carry a 1-year warranty.

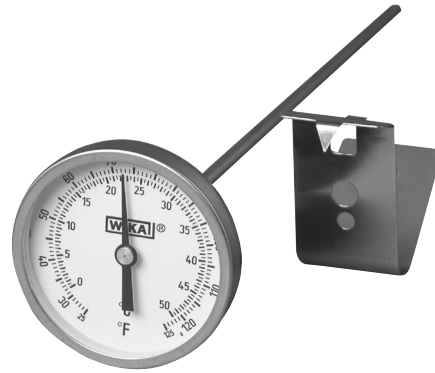

### Standard Features

<b>Case:</b>	304 SS
<b>Dial:</b>	Heavy gauge aluminum with white matte finish
<b>Window:</b>	Fully gasketed glass standard; Lexan® available
<b>Reset:</b>	7/16" hex hub adjustable (not available with threaded connection)
<b>Hermetic Seal:</b>	Per ASME B40.3; guaranteed not to fog up
<b>Stem:</b>	0.150" diameter; 304 SS, TIG welded at tip and case connection
<b>Dampening:</b>	To minimize pointer oscillation

<b>Over Range:</b>	Temporary over or under range tolerance of 50% of scale up to 500°F (260°C)
<b>Accuracy:</b>	±1% of full range span Grade A per ASME B40.3
<b>Connection:</b>	Plain, 7/16" hex hub with no threads
<b>Stem Lengths:</b>	5", 8", 12", 15" and 18"
<b>External Reset:</b>	Adjustable on plain connection only
<b>Shipping Weight:</b>	Stem length 2.5"- 9"= 4oz.** (**weights of individual thermometers)

Sample Part Number: T20 050 2 24 D0 G 0 S C

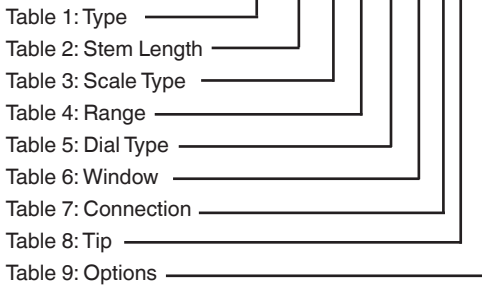


Table 1 & 2 - Type & Stem Length

Type TI.T17 - 1 3/4" Back Connected						
Stem Length	2.5"	5"	8"	12"	15"	18"
Code	025	050	080	120	150	180
Type TI.T20 - 2" Back Connected						
Stem Length	2.5"	5"	8"	12"	15"	18"
Code	025	050	080	120	150	180

Table 3 - Scale Type

Code	Description
0	Dual Scale °F & °C
1	°C Only
2	°F Only

Table 7 - Connection

Code	Description
0	Plain
1	1/8" NPT*
2	1/4" NPT*

\* No external adjustment

Table 4 - Standard Ranges

Code	Description	°C Only	°F Only
03 <sup>1)</sup>	25/125°F & -5/50°C	0/50°C	25/125°F
04 <sup>2)</sup>	0/140°F & -20/60°C	N/A	0/140°F
05 <sup>2)</sup>	0/200°F & -15/90°C	0/100°C	0/200°F
08	50/300°F & 10/150°C	0/150°C	50/300°F
10 <sup>2)</sup>	50/500°F & 10/260°C	0/250°C	50/500°F
11	150/750°F & 65/400°C	0/300°C	150/750°F
19 <sup>2)</sup>	-40/160°F & -40/70°C	-40/70°C	-40/160°F
24 <sup>2)</sup>	0/220°F & -10/110°C	-10/110°C	0/220°F
34 <sup>2)</sup>	0/180°F & -18/82°C	-18/82°C	0/180°F

1) Minimum 3" stem - all connectors

2) Minimum 3" stem threaded connections

Table 5 - Dial Type

Code	Description
D0	WIKA Standard

Table 6 - Window

Code	Description
G	Glass
L	Lexan®

Table 8 - Tip

Code	Description
S	Sharp
B	Blunt

Table 9 - Options

Code	Description
C	Beaker clip
0	None

Mechanical Temperature > Bimetal Thermometers > TI.30 / TI.50

## Type TI.30 / TI.50

WIKA bimetal thermometers are ideal for most rugged industrial temperature measurement applications. The hermetically-sealed case offers protection from weather and dust, and is guaranteed against fogging up. WIKA type TI.30 and TI.50 thermometers are guaranteed for 7 years.



### Standard Features

<b>Case:</b>	304 SS	<b>Over Range:</b>	Temporary over or under range tolerance of 50% of scale up to 500°F (260°C)
<b>Dial:</b>	Anti-parallax, heavy gauge aluminum with white matte finish	<b>Accuracy:</b>	±1% full range span (ASME B40.3 Standard)
<b>External Reset:</b>	Slotted hex adjustment	<b>Shipping Weight:</b>	Type 30: stem length 2½"-9"=12oz. Type 50: stem length 2½"-9"=1lb.8oz. (weights of individual thermometers)
<b>Window:</b>	Fully gasketed glass		
<b>Hermetic Seal:</b>	Per ASME B40.3, IP65, NEMA 4X		
<b>Stem:</b>	¼" diameter; 304 SS, TIG welded at tip and case connection. ⅜" diameter available		
<b>Dampening:</b>	Inert gel to minimize pointer oscillation		

Type	TI.30				
<b>Connection</b>	1/2" NPT Back				
<b>Dial Size</b>	3"				
<b>Stem Length</b>	2½"	4"	6"	9"	12"
-40/120 °F	30025D202G4	30040D202G4	30060D202G4	30090D202G4	30120D202G4
0/250 °F	<b>30025D206G4</b>	<b>30040D206G4</b>	<b>30060D206G4</b>	30090D206G4	30120D206G4
50/550 °F	<b>30025D216G4</b>	<b>30040D216G4</b>	30060D216G4	30090D216G4	30120D216G4
-40/120 °F & °C	30025D002G4	30040D002G4	30060D002G4	30090D002G4	30120D002G4
0/250 °F & °C	<b>30025D006G4</b>	<b>30040D006G4</b>	<b>30060D006G4</b>	30090D006G4	30120D006G4
50/500 °F & °C	30025D010G4	30040D010G4	30060D010G4	30090D010G4	30120D010G4

Type	TI.50			
<b>Connection</b>	1/2" NPT Back			
<b>Dial Size</b>	5"			
<b>Stem Length</b>	2½"	4"	6"	9"
-40/120 °F	50025D202G4	50040D202G4	50060D202G4	50090D202G4
0/250 °F	50025D206G4	50040D206G4	50060D206G4	50090D206G4
50/550 °F	50025D216G4	50040D216G4	50060D216G4	50090D216G4
-40/120 °F & °C	50025D002G4	50040D002G4	50060D002G4	50090D002G4
0/250 °F & °C	50025D006G4	50040D006G4	50060D006G4	50090D006G4
50/500 °F & °C	50025D010G4	50040D010G4	50060D010G4	50090D010G4

### Available Options

- Stem lengths: (in inches) 2½" to 72"
- Silicone fill
- Custom dials
- Min-max pointer
- Union locknut
- Dampened movement
- Window: Lexan®, acrylic, shatterproof

Stock items shown in blue print.

Mechanical Temperature > Bimetal Thermometers > TI.31 / TI.51

## Type TI.31 / TI.51

WIKA TI.31 and TI.51 bimetal thermometers offer the same features as the TI.30 and TI.50, with a fixed lower mount (bottom) connection. The hermetically-sealed case offers protection from weather and dust, and is guaranteed against fogging up. The TI.31 and TI.51 have a 7-year guarantee.



### Standard Features

<b>Case:</b>	304 SS	<b>Over Range:</b>	Temporary over or under range tolerance of 50% of scale up to 500°F (260°C)
<b>Dial:</b>	Anti-parallax, heavy gauge aluminum with white matte finish	<b>Accuracy:</b>	±1% full range span per ASME B40.3
<b>External Reset:</b>	Slotted hex adjustment	<b>Shipping Weight:</b>	Type 31: stem length - 2½" - 9" = 12oz.** Type 51: stem length - 2½" - 9" = 1lb. 10oz.** (**weights of individual thermometers)
<b>Window:</b>	Fully gasketed glass standard		
<b>Hermetic Seal:</b>	Per ASME B40.3, IP65, NEMA 4X		
<b>Stem:</b>	¼" diameter; 304 SS, TIG welded at tip and case connection. ⅜" diameter available		
<b>Dampening:</b>	Inert gel to minimize pointer oscillation.		

Type	TI.31		
<b>Category</b>	Process grade thermometer, resettable		
<b>Datasheet</b>	TI.31		
<b>Connection</b>	1/2" NPT Lower		
<b>Dial Size</b>	3"		
<b>Stem Length</b>	2½"	4"	6"
-40/120 °F	31025D202G4	31040D202G4	31060D202G4
0/250 °F	31025D206G4	31040D206G4	31060D206G4
50/550 °F	31025D216G4	31040D216G4	31060D216G4

### Available Options

- Stem lengths: (In inches) 2½" to 72"
- Silicone fill, custom dials, min-max pointer, union locknut, union connection
- Window: Lexan®, acrylic, shatterproof, sharp tip, dampened movement
- RS= Ride side connection location
- LS= Left side connection location
- TS= Top side connection location

Stock items shown in blue print.

Note: TI.51, 5" dial thermometer also available. Consult factory for details.

Mechanical Temperature > Bimetal Thermometers > TI.32 / TI.52

## Type TI.32 / TI.52

WIKA TI.32 and TI.52 bimetal thermometers are similar to TI.30 and TI.50 but with an all-angle swivel connection. The hermetically-sealed case offers protection from weather and dust, and is guaranteed against fogging up. WIKA TI.32 and TI.52 thermometers are guaranteed for 7 years.



### Standard Features

<b>Case:</b>	304 SS	<b>Over Range:</b>	Temporary over or under range tolerance of 50% of scale up to 500°F (260°C)
<b>Dial:</b>	Anti-parallax, heavy gauge aluminum with white matte finish	<b>Accuracy:</b>	±1% of full scale per ASME B40.3
<b>External Reset:</b>	Slotted hex adjustment	<b>All Angle Case:</b>	Rotation of 360° and stem variation of more than 180°.
<b>Window:</b>	Fully gasketed glass	<b>Shipping Weight:</b>	Type 32: stem length 2½"- 9"= 1lb. Type 52: stem length 2½"- 9"= 2lbs. (weights of individual thermometers)
<b>Hermetic Seal:</b>	Per ASME B40.3, IP65, NEMA 4X		
<b>Stem:</b>	¼" diameter; 304 SS, TIG welded at tip and case connection. ⅜" diameter available		
<b>Dampening:</b>	Inert gel to minimize pointer oscillation.		

Type	TI.32				
<b>Connection</b>	1/2" NPT all angle				
<b>Dial Size</b>	3"				
<b>Stem Length</b>	2½"	4"	6"	9"	12"
-40/120 °F	32025D202G4	32040D202G4	32060D202G4	32090D202G4	32120D202G4
0/250 °F	<b>32025D206G4</b>	<b>32040D206G4</b>	32060D206G4	32090D206G4	32120D206G4
50/550 °F	32025D216G4	<b>32040D216G4</b>	32060D216G4	32090D216G4	32120D216G4

Type	TI.52				
<b>Connection</b>	1/2" NPT all angle				
<b>Dial Size</b>	5"				
<b>Stem Length</b>	2½"	4"	6"	9"	12"
-40/120 °F	52025D202G4	<b>52040D202G4</b>	<b>52060D202G4</b>	52090D202G4	52120D202G4
0/250 °F	52025D206G4	<b>52040D206G4</b>	52060D206G4	52090D206G4	52120D206G4
50/550 °F	52025D216G4	52040D216G4	<b>52060D216G4</b>	52090D216G4	52120D216G4
-40/120 °F & °C	52025D002G4	52040D002G4	52060D002G4	52090D002G4	52120D002G4
0/250 °F & °C	52025D006G4	<b>52040D006G4</b>	52060D006G4	52090D006G4	52120D006G4
50/500 °F & °C	52025D010G4	52040D010G4	52060D010G4	52090D010G4	52120D010G4

### Available Options

- Stem lengths: (In inches) 2½" to 72"
- Silicone fill, custom dials, min-max pointer, Union locknut, Union connection
- Window: Lexan®, acrylic, shatterproof

Stock items shown in blue print.



Mechanical Temperature > Bimetal Thermometers > TI.33 / TI.34 / TI.53 / TI.54

## Type TI.33 / TI.34 / TI.53 / TI.54

WIKA's industrial grade bimetal dial thermometers, TI.33, 34, 53 and 54 are an ideal choice where a weather-resistant, tamper-proof thermometer is needed. Each thermometer includes a 1-year warranty.



### Standard Features

<b>Case:</b>	304 SS
<b>Dial:</b>	Anti-parallax, heavy gauge aluminum with matte finish
<b>Window:</b>	Fully gasketed glass
<b>Hermetic Seal:</b>	Per ASME B40.3, IP65, NEMA 4X
<b>Stem:</b>	1/4" diameter; 304 SS, TIG welded at tip and case connection. 3/8" diameter available
<b>Accuracy:</b>	±1% of full range span per Grade A, ASME B40.3
<b>Over Range:</b>	Temporary over or under range tolerance of 50% of scale up to 500°F (260°C)

<b>Shipping Weight:</b>	Type 33 & 34: stem length - 2 1/2" - 9" = 12oz. Type 53: stem length - 2 1/2" - 9" = 1lb. 8oz. Type 54: stem length - 2 1/2" - 9" = 12oz. (*weights of individual thermometers)
-------------------------	--

**Note:** Silicone-filled, dampened movement, min/max pointer, dry with plug, .375 stem and 316 wetted parts not available

Type	TI.33			
<b>Connection</b>	1/2" NPT back			
<b>Dial Size</b>	3"			
<b>Stem Length</b>	2 1/2"	4"	6"	9"
0/250 °F	<b>33025D206G4</b>	<b>33040D206G4</b>	<b>33060D206G4</b>	33090D206G4
50/550 °F	<b>33025D216G4</b>	33040D216G4	<b>33060D216G4</b>	33090D216G4

Stock items shown in blue print.

### Type Descriptions


Type 33 (TI.33) = 3" back connection
Type 34 (TI.34) = 3" bottom connection
Type 53 (TI.53) = 5" back connection
Type 54 (TI.54) = 5" bottom connection

### Available Options

- Stem lengths from 2 1/2" to 24"
- Ranges from -100°F (-70°C) to 1,000°F (550°C)
- Special ranges, custom dials, stems, connections and windows
- Window: Lexan®, acrylic, shatterproof
- Sharp tip

## Ordering Bimetal Thermometers

Sample Part Number: 30 025 D 2 06 G 4 XX X X

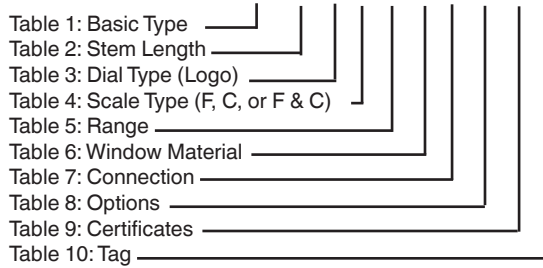

**Table 1 - Basic Type**

Process Grade - Resettable		Industrial Grade - Non-Resettable	
Type	Description	Type	Description
30	3" Back connected	20	2" Back connected
31	3" Bottom connected	33	3" Back connected
32	3" Adjustable angle	34	3" Bottom connected
50	5" Back connected	53	5" Back connected
51	5" Bottom connected	54	5" Bottom connected
52	5" Adjustable angle		

Stem lengths above 24" are not available with non-resettable models

**Table 2 - Stem Length - specify as XX.X" with no decimal point, see "code"**

Stem Length	2.5" - 9"	12"	15"	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"
Code	025-090	120	150	180	240	300	360	420	480	540	600	660	720

**Table 3 - Dial Type**

Code	Description
D	WIKA Standard logo
X	Special

**Table 4 - Scale Type**

Code	Description
0	Dual scale °F & °C
1	Single scale °C
2	Single scale °F

**Table 5 - Range**

Code	Dual Scale						Single Scale	
	°F Range	Figure Int.	Div.	°C range	Figure Int.	Div.	°F Range	°C Range
01 <sup>3</sup>	-100/150°F	20°	2°	-70/70°C	10°	1°	-100/150°F	-70/70°C
13	-80/120°F	20°	2°	-60/50°C	10°	1°	-80/120°F	-60/50°C
02	-40/120°F	20°	2°	-40/50°C	10°	1°	-40/120°F	-50/50°C
14	-20/120°F	20°	2°	-30/50°C	10°	1°	-20/120°F	-30/50°C
19	-40/160°F	20°	2°	-40/70°	10°	1°	-40/160°F	-40/70°C
23 <sup>1</sup>	0/100°F	10°	1°	-20/40°C	5°	½°	0/100°F	-20/40°C
03 <sup>1</sup>	25/125°F	10°	1°	-5/50°C	5°	½°	25/125°F	0/50°C
15 <sup>1</sup>	30/130°F	10°	1°	0/55°C	5°	½°	30/130°F	0/55°C
04	0/140°F	10°	1°	-20/60°C	5°	½°	0/140°F	-20/60°C
05	0/200°F	20°	2°	-15/90°C	10°	1°	0/200°F	0/100°C
06	0/250°F	20°	2°	-20/120°C	10°	1°	0/250°F	-20/120°C
07	20/240°F	20°	2°	-5/115°C	10°	1°	20/240°F	-10/110°C
08	50/300°F	20°	2°	10°/150°C	10°	1°	50/300°F	0/150°C
09	50/400°F	50°	5°	10/200°C	20°	2°	50/400°F	0/200°C
10	50/500°F	50°	5°	10/260°C	20°	2°	50/500°F	0/250°C
16 <sup>3</sup>	50/550°F	50°	5°	10/290°C	20°	2°	50/550°F	10/290°C
17 <sup>3</sup>	0/600°F	100°	10°	-20/315°C	50°	5°	0/600°F	-20/315°C
11 <sup>3</sup>	150/750°F	100°	10°	65/400°C	50°	5°	150/750°F	0/300°C
18 <sup>3</sup>	100/800°F	100°	10°	40/425°C	50°	5°	100/800°F	0/450°C
12 <sup>2,3</sup>	200/1,000°F	100°	10°	100/540°C	50°	5°	200/1,000°F	100/550°C

Notes:

1. Not available with 2½" stem
2. Not recommended for continued use over 800°F
3. Silicone fill not available

## Ordering Bimetal Thermometers

Sample Part Number: 30 025 D 2 06 G 4 XX X X

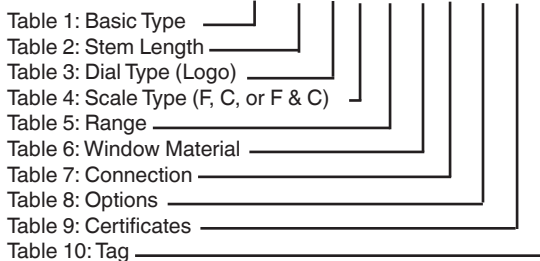


Table 6 - Window	
Code	Description
A	Acrylic lens
L	Lexan® lens
S <sup>1</sup>	Shatterproof lens
G <sup>1</sup>	Glass
<sup>1</sup> not available with silicone fill	

Table 7 - Process Connection	
Code	Description
0	Plain conn.
1	1/8 NPT
2	1/4 NPT
3	3/8 NPT
4	1/2 NPT
5	G 1/2 B
7	Union conn.

Table 8 - Options	
Code	Description
DM	Dampened movement
SF	Silicone fill
ST	Sharp tip
MM	Min/max pointer
LS	Left side
RS	Right side
TS	Top side
DF <sup>2</sup>	Dry w/plug
<sup>2</sup> Prepares unit for liquid case filling and shipped dry	

0.375 Stem Diameter Upgrade Option	
Code	Description
HA	Full length
HD	Reduced tip
HS	Reduced w/sharp tip

316 SS Wetted Parts Upgrade for 0.250 Stem Diameter	
Code	Description
SS	316 SS wetted parts

Table 9 - Certificates	
Description	Code
NIST Factory Certificate of Accuracy	I

Accessories	
Part Number	Description
TA-600-011	1/2" Union locknut
TA800-0T85	T-85 conv. kit
TA800-0020	1/2" NPT duct flange
2256045	5.3 oz. tube heat transfer compound for use in thermowells

Notes:  
Certificate of compliance available at no charge

## Bimetal Thermometers Options




### DAMPENED MOVEMENT

#### Dampened Movement

Engineered solution providing benefits of case fill in a dry configuration. This silicone-free option provides dampening in tough environments at all available temperature ranges. Available in all process grade models.


#### T-85 Thermowell Conversion Kit

This conversion kit offers an easy, inexpensive way to install a WIKA bimetal thermometer in a glass industrial thermometer's thermowell. For more information, please consult factory. To order, specify part number **TA800-0T85**.

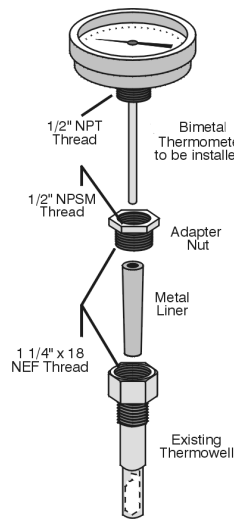

#### Adjustable Union Connection

The WIKA adjustable union connection allows for the installation of a type 32 or 52 adjustable angle thermometer without rotating the case. Ideal for use in a confined space.

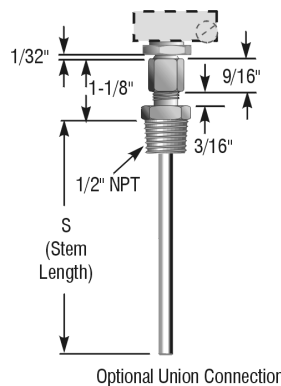

Optional Union Connection

#### Left, Right or Top Connection


All WIKA 3" and 5" bottom connected thermometers are available with the connection oriented to the left, right or top. Please see "How to Order" on next page for this option.

#### Not Shown

- Heavy duty 3/8" stems and 3/4" stems with 2 1/2" x 1/4" OD sensitive portion available
- Thermometers may be ordered with sharp tips for piercing media to be measured
- 316 SS wetted parts are available
- 1/2" NPT duct flange
- Acrylic, Lexan®, shatterproof and glass windows
- Stainless steel tags are available options
- Silicone fill
- Certificates of Conformance, Origin and Calibration available
- Please see these options on Table 8 of "Ordering Bimetal Thermometers".
- Other options are available. Please consult factory



#### Union Lock Nut

The WIKA union lock nut provides a simple and inexpensive means to mount WIKA bimetal thermometers with 1/2" NPT so that the dial is oriented for proper viewing. For more information, please consult factory. To order, specify part number **TA600-0111**.

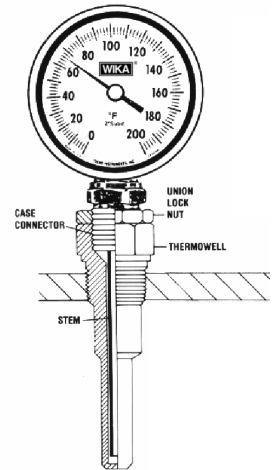

#### Maximum or Minimum Indicating Pointer

This option allows operator to view what the highest or lowest temperature has been in the process. High vibration environments are not recommended.

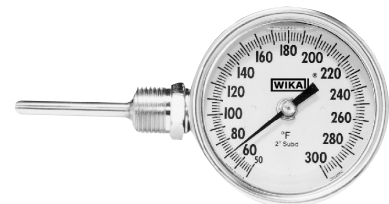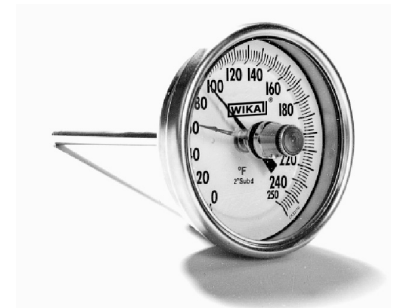

Mechanical Temperature > Digital Thermometers > TI.80 / TI.82

## Type TI.80 / TI.82

WIKA's solar-powered digital thermometers are ideal for power utilities, petrochemical and quality control applications, where exact readings are required. TI.80 and TI.82 offer easy-to-read digital temperature in single-degree increments in either Fahrenheit or Celsius scales. TI.80 has a center back mount, while the TI.82 has an adjustable angle, hermetically-sealed case.



### Standard Features

- Case:** 304 SS
- Stem:** 304 SS, lengths from 1" to 24"
- Window:** Glass standard, acrylic available
- Connection:** 1/2" NPT, others available
- Sensor System:** Ceramic thermistor requiring lighting of only 35 LUX to operate the 3-volt solar cell. The circuitry offers a fast 15-second update time and accuracy to within 1% of scale. A patented safety circuit prevents false readings
- Accuracy:** ± 1% of full range span

Type	TI.80							
Connection	1/2" NPT Back							
Dial Size	3"							
Stem Length	2 1/2"	4"	6"	9"	12"	15"	18"	24"
-50/300 °F	80025D2G4	80040D2G4	80060D2G4	80090D2G4	80120D2G4	80150D2G4	80180D2G4	80240D2G4
-50/150°C	80025D1G4	80040D1G4	80060D1G4	80090D1G4	80120D1G4	80150D1G4	80180D1G4	80240D1G4

Type	TI.82							
Connection	1/2" NPT Just-Right Adjustable Angle							
Dial Size	3"							
Stem Length	2 1/2"	4"	6"	9"	12"	15"	18"	24"
-50/300 °F	82025D2G4	82040D2G4	82060D2G4	82090D2G4	82120D2G4	82150D2G4	82180D2G4	82240D2G4
-50/150°C	82025D1G4	82040D1G4	82060D1G4	82090D1G4	82120D1G4	82150D1G4	82180D1G4	82240D1G4

Options		
	Code	Description
Connection	0	Plain
	2	1/4" NPT
	3	3/8" NPT (TI.80 only)
Window	A	Acrylic
Accessories	ST	Shart tip
	SS	316 SS wetted parts
Stem	HD	3/8" dia. stem w/ 2 1/2" L x 1/4" dia. tip
	HS	3/8" dia. stem w/ 2 1/2" L x 1/4" dia. sharp tip

Stock items shown in blue print.

Mechanical Temperature > Twin-Temp Thermometers > TT.30 / TT.32 / TT.50 / TT.52

## Type TT.30 / TT.32 / TT.50 / TT.52

The Twin-Temp thermometer combines the convenience, simplicity and self-powered actuation of a bimetal thermometer and data acquisition capabilities of a thermocouple or RTD electrical output. With standards traceable to the NIST, the Twin-Temp offers simplified calibration for ISO 9001 compliance and other statistical process control requirements. It is ideal in applications requiring quick and easy readability at the point of process, while still affording a means of electronic data acquisition and digital panel remote read-out. The Twin-Temp puts two temperature sensors to work at one location.



### Standard Features

<b>Case and Bezel:</b>	304 SS	<b>Over Range:</b>	Maximum exposure 500°F
<b>Case:</b>	All angle or back connected	<b>Thermocouple:</b>	Type K grounded junction thermocouple standard Types J, E and T available
<b>Dial Size:</b>	3" or 5"	<b>RTD:</b>	100-Ohm thin film platinum DIN Curve (.00385 Ohm/ Ohm/°C), 3 wire standard
<b>Process Connection:</b>	½" NPT standard	<b>Accuracy:</b>	± 1% of full range span
<b>External Reset:</b>	Slotted hex head, fully gasketed	<b>Warranty:</b>	1 year
<b>Window:</b>	Glass, fully gasketed	<b>Wiring:</b>	Twin-Temp (RTD): red-terminal 1, green-terminal 2, black-terminal 3 Twin-Temp (T/C): negative-red always, positive-colored (depends on t/c type)
<b>Hermetic Seal:</b>	Per ASME B40.3	<b>Note:</b>	Silicone fill not available
<b>Stem:</b>	304 SS, TIG welded at tip and case connector to prevent leakage. ¼" diameter standard, lengths available from 2½" to 48" for thermocouple, 4" to 48" for RTD.		

Mechanical Temperature > Twin-Temp Thermometers > Ordering Twin-Temp Thermometers

## Ordering Twin-Temp Thermometers

### HOW TO ORDER:

Select the appropriate codes and combine to complete thermometer part number.

Sample Part Number: 30 060 D 0 01 G 4 R1 A R

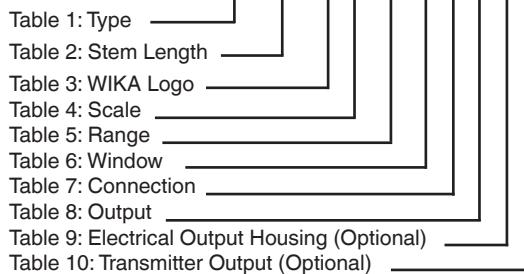


Table 1 - Basic Type

Code	Description
30	3" Back connected (with reset)
32	3" All angle (with reset)
50	5" Back connected (with reset)
52	5" All angle (with reset)

Table 2 - Stem Length

(Pick stem length from either thermocouple or RTD table)

Code	Description
XXX	Length in inches with one decimal place (XX.X) RTD available only in 4" to 48" (040-480) stem length. Thermocouple available 2½" to 48" (025-480).

### Thermocouples - Types J, K, E, T Grounded Thermocouple Output (consult factory for ungrounded)

Stem Length	2.5	4	6	9	12	15	18	24	30	36	42	48
Code	025	040	060	090	120	150	180	240	300	360	420	480

Note: Thermocouple junction is welded to tip of stem

or

### 100 Ohm RTD Output

Stem Length	2.5	4	6	9	12	15	18	24	30	36	42	48
Code	025	040	060	090	120	150	180	240	300	360	420	480

Note: RTD is placed in stem above bimetal helix (requires minimum 3½" insertion)

# TWIN-TEMP THERMOMETERS

Mechanical Temperature > Twin-Temp Thermometers > Ordering Twin-Temp Thermometers

Table 3 - Dial Type	
Code	Description
D	WIKA standard
X	Special

Table 4 - Scale Type	
Code	Description
0	Dual scale °F & °C
1	Single scale °C
2	Single scale °F

Table 5 - Ranges			
Code	Dual Scale °F & °C	Dual Scale	
		Single Scale °C	Single Scale °F
02*	-40/120°F & -40/50°C	-50/50°C	-40/120°F
03*	25/125°F & -5/50°C	0/50°C	25/125°F
04*	0/140°F & -20/60°C	-20/60°C	0/140°F
5	0/200°F & -15/90°C	0/100°C	0/200°F
6	0/250°F & -20/120°C	-20/120°C	0/250°F
7	20/240°F & -5/115°C	-10/110°C	20/240°F
8	50/300°F & 10/150°C	0/150°C	50/300°F
9	50/400°F & 10/200°C	0/200°C	50/400°F
10	50/500°F & 10/260°C	0/250°C	50/500°F
16	50/550°F & 10/260°C	10/290°C	50/550°F

\* Not available with 2 1/2" stem

Table 6 - Window	
Code	Description
G	Plain glass
A	Acrylic
L	Lexan®
S	Shatterproof

Table 7 - Connection	
Code	Description
2	1/4" NPT
4	1/2" NPT

Choose an electrical output configuration from either the left column only or right column only

Table 8 - Electrical Output & Connection Type Selections	
Order from this column for direct thermocouple (female plug) or RTD (mini 3-pos terminal block) output only; <b>will not accept transmitter or enclosure head options.</b>	
Electrical weatherproof housing connection is a 7/8-20 UNEF. Thermocouple = female plug RTD = 3-wire mini-terminal block	
Code	Description
TJ	Thermocouple output, Type J (female plug)
TK	Thermocouple output, Type K (female plug)
TE	Thermocouple output, Type E (female plug)
TT	Thermocouple output, Type T (female plug)
RA	100 Ohm RTD output, 3-wire (terminal block)

Table 9 - Electrical Output Housing Options	
(Match code to Table 8 output)	
<b>For non-transmitter units.</b> Plug-in (RTD output wire-in) field connections only. (Match code to output selection in Table 8)	
Code	Description
X	None
J	Straight barrel weather proof housing (7/8-20 UNEF) & plug
K	Straight barrel weather proof housing (7/8-20 UNEF) & plug
E	Straight barrel weather proof housing (7/8-20 UNEF) & plug
T	Straight barrel weather proof housing (7/8-20 UNEF) & plug
R	Straight barrel weather proof housing (7/8-20 UNEF)

Table 10 - Transmitter Output	
<b>For non-transmitter equipped units.</b> Plug-in (RTD output wire-in) field connection only.	
Code	Description
X	None (mandatory on all non-transmitter types, must use this code "X" for all TJ/TK/TE/TT/RA from Table 8)


Table 8 - Electrical Output & Connection Type	
Order from this column for unit with lead wires for both thermocouple or RTD output; <b>will accept enclosure head for transmitter or terminal block housing options.</b>	
Electrical enclosure connection is a 1/2" NPT. Thermocouple or RTD is 6" flying lead wire.	
Code	Description
J1	Thermocouple output, Type J
K1	Thermocouple output, Type K
E1	Thermocouple output, Type E
T1	Thermocouple output, Type T
R1	100 Ohm RTD output, 3-wire

Table 9 - Electrical Output Housing Options	
<b>For transmitter-equipped units.</b>	
Code	Description
X	None
A	*Std aluminum head enclosure
H	*Exp. proof head
* 1/2" NPT Twin-Temp x 3/4" NPT field connection	

Table 10 - Transmitter Output	
<b>For transmitter-equipped units.</b>	
Code	Description
X	None (mandatory on all non-transmitter types; must use this code "X" for all TJ/TE/TT/RA from Table 8)
T	<sup>1,3</sup> 4-20mA transmitter for all Thermocouple output
R	<sup>2,3</sup> 4-20mA transmitter for all "R1" RTD output (from Table 8)
B	<sup>3</sup> Terminal block (for field wiring termination, when transmitter no used)
<sup>1</sup> only compatible with codes J1/K1/E1/T1 <sup>2</sup> only compatible with code R1 <sup>3</sup> must use code A or H from Table 9 for enclosure	


MECHANICAL TEMPERATURE

## Twin-Temp Configurations




### 1. Weatherproof Housing and Plug

$\frac{7}{8}$ -20 UNEF threaded barrel with bushing and compression nut provide environmental protection to thermocouple / RTD connection. (Order code J,K,E,T or R from Table 9)



### 2. 1/2" NPT Electrical Connection with Lead Wire

Available in thermocouple or RTD. This allows site installation using other enclosures or piping systems. (Order code J1, K1, E1, T1 or R1 from Table 8)

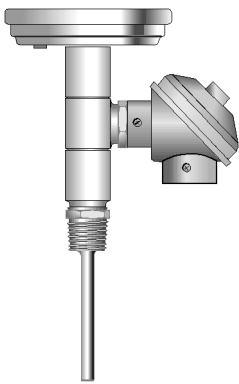

### 3. Enclosure Head

A protective enclosure threads onto the optional 1/2" NPT electrical connection. The housing protects electrical connections from the environment. Houses a 4-20 mA transmitter or terminal block. Aluminum housing is standard. (Order code A from Table 9)

### 4. Terminal Block

Provides a connection point for the thermocouple or RTD. Mounts to thermocouple head with two screws. Requires lead-wire output connection (order code J1/K1/E1/T1/R1 from Table 8) and aluminum head enclosure. (Order code A from Table 9)



### 5. T-12 Thermocouple or T-24- RTD, 4-20 mA Transmitter


Provides a clean 4-20 mA signal to control room, data acquisition equipment, panel readout, etc. Requires lead-wire output connection (order code J1/K1/E1/T1/R1 from Table 8) and aluminum head enclosure (order code from Table 9).

Spare Parts	
Description	Part Number
Std aluminum head	102-02
Terminal block	2246228
Weather-proof housing	TA6S0-0608
<sup>1</sup> When order separate of a Twin-Temp, range must be specified	






# Twin-Temp Configurations


**Type TT.30  
w/enclosure head**

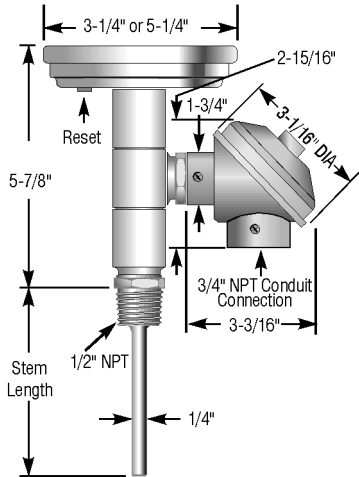



**Type TT.52  
w/thermocouple  
connection**

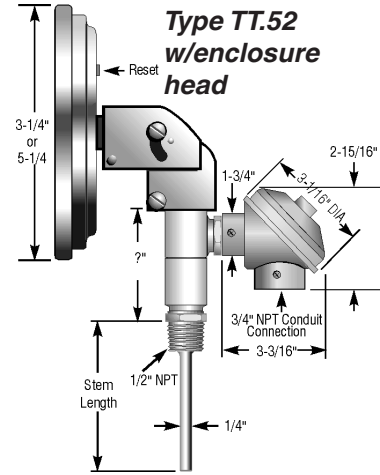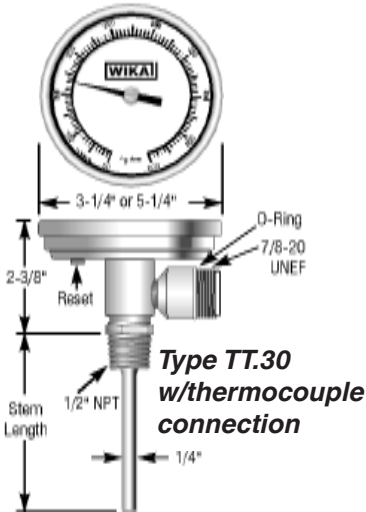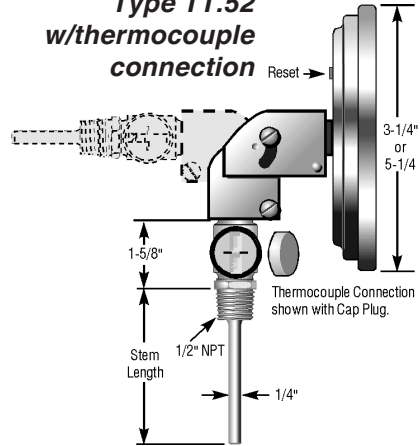

**Type TT.30  
w/thermocouple Plug-in**



**Type TT.30  
w/RTD terminal block**



MECHANICAL TEMPERATURE

# TWIN-TEMP SOLAR THERMOMETERS

Mechanical Temperature > Twin-Temp Solar Thermometers > TT.80, TT.82

## Type TT.80, TT.82

This unique thermometer has the convenience of a LCD digital output and the data acquisition capabilities of a thermocouple or RTD electrical output in one process location.



### Standard Features

<b>Case and Bezel:</b>	304 SS	<b>RTD:</b>	100-Ohm thin film platinum DIN Curve (.00385 Ohm/Ohm/°C), 3 wire standard
<b>Case:</b>	All angle or back connected	<b>Accuracy:</b>	± 1% of full range span
<b>Dial Size:</b>	3"	<b>Warranty:</b>	1 year
<b>Process Connection:</b>	½" NPT standard	<b>Wiring:</b>	Twin-Temp (RTD): red-terminal 1, green-terminal 2, black-terminal 3 Twin-Temp (T/C): negative-red always, positive-colored (depends on t/c type)
<b>Window:</b>	Glass, fully gasketed	<b>Note:</b>	Silicone fill not available
<b>Hermetic Seal:</b>	Per ASME B40.3		
<b>Stem:</b>	304 SS, TIG welded at tip and case connector to prevent leakage. ¼" diameter standard, lengths available from 2½" to 24".		
<b>Thermocouple:</b>	Type K grounded junction thermocouple standard. Types J, E, T available		

Mechanical Temperature > Twin-Temp Solar Thermometers > Ordering Twin-Temp Solar Thermometers

## Ordering Twin-Temp Solar Thermometers

### HOW TO ORDER:

Select the appropriate codes and combine to complete thermometer part number.

Sample Part Number: 80 040 D 6 G 4 R1 A R

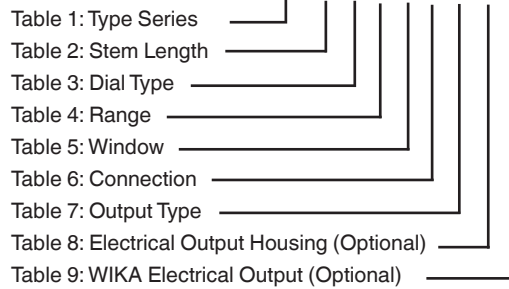


Table 1 - Basic Type	
Code	Description
80	3" Back connected
82	3" All angle

Table 2 - Stem Length	
Code	Description
025	2.5"
040	4"
060	6"
090	9"
120	12"
150	15"
180	18"
240	24"

Table 3 - Dial Type	
Code	Description
D	WIKA standard

Table 4 - Ranges	
Code	Description
1	-50/300 °F
2	-50/150 °C

Table 5 - Window Material	
Code	Description
G	Plain glass
A	Acrylic

Table 6 - Process Connection	
Code	Description
4	1/2" NPT

Table 7 - Electrical Output	
Code	Description
J1	Thermocouple output, type J
K1	Thermocouple output, type K
E1	Thermocouple output, type E
T1	Thermocouple output, type T
R1	100 Ohm RTD output, 3-wire

Table 8 - Electrical Output Housing Options	
Code	Description
X	None
A	Std Aluminum head enclosure

Table 9 - Transmitter Output	
Code	Description
X	None
T	<sup>1,3</sup> 4-20mA transmitter for all thermocouple output
R	<sup>2,3</sup> 4-20mA transmitter for all "R1" RTD output (from Table 8)
B	<sup>3</sup> Terminal block (for field wiring termination, when transmitter not used)

<sup>1</sup> only compatible with codes J1/K1/E1/T1  
<sup>2</sup> only compatible with code R1  
<sup>3</sup> must use code A Table 8 for enclosure

## Gas Actuated Thermometers Operating and Installation

Gas actuated thermometers fall within “Class IV, gas-filled with absorbent” definition. They use a thermal system filled with gas and an absorbent (such as activated granular carbon) in the bulb. This technology allows for a significantly reduced bulb size. WIKA gas actuated thermometers offer extremely high accuracy, low ambient error and extreme over-range capability. With the same small bulb diameter throughout the offered ranges, the WIKA thermometer can be installed in most existing piping and tank applications.

WIKA gas actuated thermometers provide the solution to mercury-free requirements in food processing, refrigeration or other mercury-sensitive environments. A variety of case types, sizes and materials provides a custom made instrument for each application in ranges between -320° Fahrenheit and +1200° Fahrenheit or equivalent Celsius. Dual reading scales (F & C) are standard.

WIKA gas actuated dial thermometers are available as direct reading or remote reading with stainless steel bulbs and armored capillary. WIKA extends a one-year warranty against defects in material and workmanship on standard gas actuated dial thermometers.

**Installation Guidelines:** While WIKA gas actuated dial thermometers are highly accurate and rugged instruments, there are some guidelines that should be followed in their application and installation. Consideration must be given to the measured medium. Is it corrosive, abrasive, turbulent or under pressure? Can the sensing bulb be placed to give an accurate indication of the temperature?

The sensing bulb should be placed in a non-turbulent area of piping or ducting and as close the center of the flow as possible. In tanks, it should be placed in an area of the tank that will provide a good average of the temperature of the fluid contained. The bulb should be protected from corrosive or abrasive media and excessively high pressures. The usual method of protection is the use of a thermowell.


When a remote reading thermometer is installed, consideration must be given to the location of the bulb, the dial indicator and the routing of the capillary. The capillary must be located where it will not be damaged by workers or equipment used in future maintenance. Remember that the capillary CANNOT be cut to facilitate installation or relocation.

### For Installation and Use of WIKA Filled System Dial Thermometers

**General:** Before installing a thermometer, consideration should be given to temperature, humidity, vibration, shock and other climatic and ambient conditions of the service application. Bulbs may be installed in thermowells or directly into the medium for temperature measurement. The filled system of the thermometer is a sealed unit and must remain sealed. The connecting tubing of remote units should be kept coiled to avoid sharp bends or kinks. Connecting tubing must not be cut. Thermometers can be rendered inaccurate during shipment despite care taken in packaging. To insure conformance to the accuracy to which the thermometer was manufactured, it should be checked before use.

**Installation Procedure:** The bulb should be located in the process at the point that will provide the temperature indication that is most representative of the process temperature. Circulation of the medium around the bulb is necessary for optimum response time and accuracy. For direct reading thermometers, use wrench flats when provided to install the thermometer. For remote reading thermometers – do not twist, kink, strain or cut the connecting tube. After the case has been mounted, uncoil and stretch out the connecting tubing, placing the bulb at its intended location. After installing the bulb, fasten the connecting tubing to a wall or other support to prevent damage. Position the connecting tubing to avoid extreme temperature. Since the connecting tubing length cannot be altered, any excess should be coiled on a 3" minimum radius and supported near the case.

Gas actuated thermometers have the following options and accessories:  
 Flush Mounting Ring: Adapts the phenolic case for flush panel mounting.  
 Windows: Optional acrylic or shatterproof glass available.

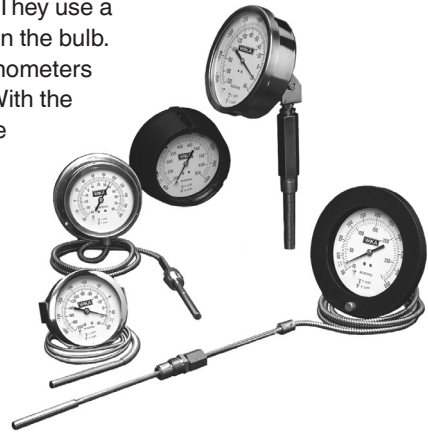

## Gas Actuated Thermal Systems


The WIKA gas actuated dial thermometer systems are available in several bulb and material configurations. The application should be the determining factor in deciding both the type and material of the thermal system. For use in corrosive or otherwise more demanding installations, WIKA offers a 316 SS bulb and capillary. The stainless steel system is protected with stainless steel spring armor or an optional stainless steel interlocking armor. **It should be noted that the unions on these systems DO NOT provide a pressure seal.** For pressure seals, always use in conjunction with a thermowell.

For installations requiring a pressure seal between the process and the atmosphere, a thermowell should be used. The bendable extension with a sliding union allows for variable insertion depths to place properly the active portion of the sensing bulb in the process for maximum accuracy. Aluminum duct flanges are available for threading union fitted bulbs into duct work to provide temperature indication of ducted air or gases.

### Thermal Systems

Code No.	Bulb Type	Bulb Material	Capillary Material	Capillary Protection
0	Just-Rite	316 SS	N/A	N/A
1	Plain	316 SS	316 SS	Stainless steel spring armor**
8	½" NPSM Sliding Union	316 SS	316 SS	Stainless steel spring armor**

\*\*Stainless steel interlocking armor is available and must be used on systems longer than 40 feet.

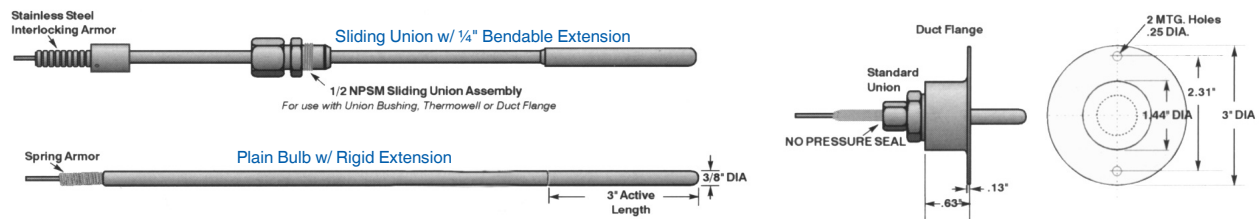

Bulbs available on WIKA gas actuated dial thermometers have 3/8" diameters to allow for installation in most existing piping and tanks. As the bulb is the temperature sensing element of the system, it must be placed where the most accurate temperature reading can be obtained. In piping, this is usually the center of the flow in an area of least turbulence. In tanks, this is an area that will represent a good average of the fluid temperature - usually close to the center of the tank. Available materials, lengths and insertion depths for standard bulbs are listed in the accompanying chart.

### Bulbs (All bulbs with threaded connections are ½" NPT)

Code No	Bulb Type	Bulb Material	Bulb Length	Extension Length	Insertion - U Thermowell Standard	Dimension Thermowell Lag Extension
1	Plain w/extension	316 SS	3"	12"	2½" - 10½"	-
4	Just-Rite	316 SS	4"	-	2½"	-
6	Just-Rite	316 SS	6"	-	4½"	2½"
9	Just-Rite	316 SS	9"	-	7½"	4½"
X	Just-Rite	316 SS	12"	-	10½"	6½"
7	Sliding union	316 SS	3"	12"	2½" - 10½"	2½" - 7½"
8	Sliding union	316 SS	3"	18"	2½" - 16½"	2½" - 13½"

\*3" active length

# GAS ACTUATED THERMOMETERS

Mechanical Temperature > Gas Actuated Thermometers > TI.R45, TI.R60

## Type TI.R45, TI.R60

WIKA gas actuated remote reading dial thermometers are manufactured in three wall-mounted case styles: the cast aluminum back flange case with a 4½" dial size, the phenolic/GRP turret case (also with a 4½" dial size) and the stainless steel back flange case available in 4½" and 6" dial sizes. All may be specified with back or lower connected capillaries.



### Standard Features

**Accuracy:** ±1% of full range span  
**Over Range:** 50% of span above top of range or 1300°F, which ever is lower  
**Cases:** Drawn stainless steel, aluminum and Phenolic/GRP; for stem, surface or panel mount  
**Sizes:** 4½", 6"  
**Mounting Connections:** Lower or back on remote reading thermometers; adjustable angle on Just Rite  
**Bulb:** 3/8" dia. x 3" active length standard in stainless steel; plain, sliding union

**Capillary:** 316 SS with stainless steel spring armor, or 316 SS with stainless steel interlocking armor. 99' maximum  
**Dials:** White coated aluminum with black marking  
**Pointer:** Adjustable, balanced, aluminum with matte black finish  
**Ambient Error:** 0.25% at midscale of span per 25° F change in ambient temp

**Case Styles:** Wall mount-manufactured in 3 wall-mounted case styles: cast aluminum back flange case with 4½" dial size, the phenolic/GRP turret case with 4½" dial size, and stainless steel back flange case in 4½" and 6" dial sizes; may be specified with back or lower-connected capillaries.

Just-Rite's standard bulb/stem thermal system is available in 4", 6" and 9" lengths; only 3" of the tip is active. Panel mount WIKA gas actuated remote reading dial thermometers accommodate most panel mounting requirements. Stainless steel U clamp cases are available in 4½" and 6". Aluminum front flange cases offer 4½" and 6" dial sizes. A stainless steel semi-flush front flange case is available in 4½" and 6" dial sizes. All panel mount thermometers are back connected. Turret phenolic case is available in 4½". Just-Rite is available in 4½" and 6".

Adjustable angle-flangeless, stainless steel case with bayonet bezel and 360° rotation. Stainless steel bulb can be rotated 180° to either side of the vertical axis of the stem to allow mounting from the top, bottom or either side of an installation. Union fitted bulb can be threaded directly into a process connection or into a thermowell or duct flange.

Mechanical Temperature > Gas Actuated Thermometers > Ordering Gas Actuated Thermometers

## Ordering Gas Actuated Thermometers

### HOW TO ORDER:

Select the appropriate codes and combine to complete thermometer part number.

Table 1 - Basic Type


Code	Description
R45	4½" Case
R60	6" Case

Table 2 - Case Type & Material

Code	Description	Material	Dial Size
K	Back flange, bayonet ring	SS	4½", 6"
B	Back flange, bayonet ring	Aluminum	4½", 6"
E	Turret, threaded ring	Phenolic	4½"
F	Front flange, hinged ring	Aluminum	4½", 6"
S	Semi-flush front flange, bayonet ring	SS	4½", 6"
U	U-clamp, bayonet ring	SS	4½" 6"
*V	Just-Rite, adjustable angle	SS	4½" 6"

\* Capillary is not available. Fixed stem length only as specified in Table 6.

Sample Part Number: R45 E L 3 8 7 10 004 00 WI

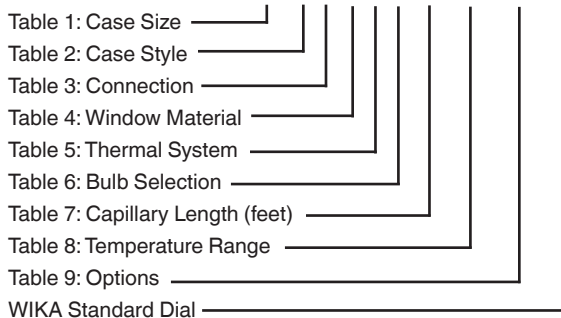

# GAS ACTUATED THERMOMETERS

Mechanical Temperature > Gas Actuated Thermometers > Ordering Gas Actuated Thermometers

**Table 3 - Connection**

Code	Description	Case Size	Case Type
B	Back connection	4½", 6"	All
L	Lower connection	4½", 6"	4½" (K, B, E); 6" (K only)
*A	Adjustable angle	4½", 6"	V only

\* Capillary is not available. Fixed stem length only as specified in Table 6.

**Table 4 - Window**

Code	Description	Case Size	Case Type
3	Acrylic	4½"	B, E
4	Glass	4½", 6"	All
5	Shatter-proof glass	4½"	E, K, E, U, V

**Table 5 - Thermal System**

Code	Bulb Type	Bulb Material	Capillary Material	Capillary Protection
0	Adjustable angle ½" NPT	316 SS	N/A	**N/A
1	Plain	316 SS	316 SS	Spring armor*
8	Sliding union ½" NPT	316 SS	316 SS	Spring armor*

\* For systems up to 40 ft.; Spiral interlock required on all systems over 40 ft. (see "SI" options, Table 9)

\*\* Capillary is not available; fixed stem length only as indicated in Table 6.

**Special Table 5 & 6 Note:**

The only possible thermal system/bulb combinations are as follows:

Plain Bulb: (11)  
Adjustable Angle: (04), (06), (09), (0X)  
Sliding Union: (87), (88)

**Table 6 - Bulb Selection**

Code	Description	To fit Thermowells with:	
		OA Length	Thermowell Insertion
<b>Adjustable Angle Code 0, Table 5</b>			
4	3/8" Dia. x 3" length (active), total 4"	4¼"	U = 2½"
6	3/8" Dia. x 3" length (active), total 6"	6¼"	U = 4½"
9	3/8" Dia. x 3" length (active), total 9"	9¼"	U = 7½"
X	3/8" Dia. x 3" length (active), total 12"	12¼"	U = 10½"

**Plain Bulb - Remote Code 1, Table 5**

1	3/8" Dia. x 3" length (active) + 10" rigid extension		
---	--	--	--

**Sliding Union (½" NPSM) Bulb w/Bendable Ext. Code 8, Table 5**

		Union	Thermowell Insertion
7	3/8" Dia. x 3" length (active) w/ 12" bendable extension	3 to 12"	U = 2½" to 10½"
8	3/8" Dia. x 3" length (active) w/ 18" bendable extension	3 to 18"	U = 2½" to 16½"

Note: Gas-actuated thermometers use standard process type 3/8" bore thermowells, if required. Order separately.

**Table 7 - Capillary Length**

Code	Description
05	5 feet
10	10 feet
20	20 feet
30	30 feet
40	40 feet
*50	50 feet
*80	80 feet
XX	Adjustable angle case

\* Requires "SI" option, see Table 9

**Note:**

Capillary can be configured to any whole foot, 99' and below. I.E. - 08 = 8' capillary

**Table 8 - Temperature Range**

Code	Dual Scale °F & °C	
*001	-320/100°F	-200/40°C
002	-120/120°F	-80/50°C
003	0/120°F	-20/50°C
004	0/160°F	-20/70°C
005	-40/180°F	-40/80°C
006	20/240°F	-10/115°C
007	0/300°F	-20/150°C
008	50/550°F	0/300°C
009	50/750°F	0/400°C
**010	400/1,200°F	200/650°C
11	50/400°F	0/200°C

\* Requires "LT" option, See Table 9

\*\* Requires "HT" option, See Table 9

**Note:**

Ranges marked with an asterisk(\*) indicated in Table 8 reference Table 9 and require additional cost as indicated.

**Table 9 - Options & Accessories**

Code	Description	Case Size	Case Type
00	Without accessories	All	All
FR	Flush mounting ring	4½"	E
*LT	Low temperature (Cryogenic -320°F)	All	All
**HT	High temperature (1200°F)	All	All
***SI	316 SS interlocking armor	All	All
DM	Dampened movement	All	All

\* Requires Temperature Range Code "001", See Table 8

\*\* Requires Temperature Range Code "010", See Table 8

\*\*\* Required for all systems over 40 feet

**Table 10 - Dial Logo**

Code	Description
WI	WIKAI
BL	Blank

# Gas Actuated Thermometers

## Temperature Switch Gauge Operating and Installation

Operation: WIKA's TI.TSG60 temperature switch gauge is a patented technology that offers the best accuracy and least ambient error in remote temperature technology. Our direct drive edge-welded Bourdon tube offers a linear 180° dial arc while maintaining positive operation of micro switches with a 1½% accuracy full scale with better than ½% repeatability. Most important is the extremely low ambient error due to the NiSpan Bourdon tube and carbon-filled molecular sieve gas actuated patented technology. The cam adjustable switches offer little resistance to the powerful direct drive system offering consistent switch action with low repeatability error.

Our dual system SCADA version offers dual independent outputs with a failsafe redundant system. Total independence offers accuracy of remote electronics plus the reliability of the local mechanical dial readout all within one unit. The SCADA system comes fully calibrated and requires no field calibration.

**Switching:** Up to four filled adjustable switches are available with standard ratings of 10 AMP @ 125/250 VAC, non-inductive; 5 AMP @ 120 VAC, inductive; ½ AMP @ 125 VDC, non-inductive; ¼ AMP @ 250 VDC, non-inductive. The differential is 3% of the range. Switches are fully adjustable within the full range of the instrument. Switches can be set within 2° C of each other.

**Mounting / Installation:** The TI.TSG60 temperature switch gauge is ideal for general industrial installations. Switches can be adjusted from the front of the unit without having to shut down or remove the instrument from the process.

**Adjustment of the Set Points:** The TI.TSG60 has up to four fully adjustable set points adjustable from the front of the unit. The set point indicators are easily adjusted and then locked in place with the following procedure:

1. Unscrew and remove the front bezel and lens counter-clockwise, as it is shipped from the factory hand tightened.
2. Using a small straight screwdriver, loosen the Set Point indicator and, using two fingers, position the indicator to the desired Set Point, and re-tighten the Set Point indicator.
3. Replace the bezel and lens and, using a strap wrench, rotate the bezel and lens clockwise 3/8" beyond hand tight to fully engage the waterproof gasket. Do not over tighten.

**Max. Hand Setting:** The TI.TSG60 is available with a maximum registering hand that will indicate the highest temperature the unit records by staying at that point. To re-set the max, hand turn the knob counter-clockwise until it rests against the pointer.

## Type TI.TSG60

WIKA's TI.TSG60 offers users an unprecedented combination of industrial strength performance with unmatched precision. This 6" gas actuated thermometer is accurate to within 1½% of scale and can tolerate up to 50% over range temperatures. Sealed inside the rugged stainless steel case are up to four single pole, double throw 10 amp switches for enabling a variety of switching actions. The thermal system is stainless steel and filled with inert nitrogen making the TI.TSG60 ideal for steel and paper mills, refineries, petrochemical, and food and pharmaceutical plants.



### Standard Features

<b>Case and Bezel:</b>	304 SS, 6.25" diameter	<b>Over Range:</b>	50% up to 500°F, except 10% on 0 - 120°C and 0 - 250°F
<b>Case Style:</b>	Bottom connected back flange	<b>Capillary:</b>	Stainless steel with stainless steel interlocking armor; up to 99'
<b>Process Conn:</b>	3/8" x 3" 316 SS bulb with 12" or 18" bendable extension, and ½" NPT one-time compression fitting	<b>Switch Rating:</b>	10 amp @ 125/250 VAC, non-inductive; 5 amp @ 120 VAC, inductive; ½ amp @ 125 VDC, non-inductive; ¼ amp @ 250 VDC, non-inductive
<b>Window:</b>	Lexan®		
<b>Range:</b>	11 standard ranges available. See "How to Order"		

Mechanical Temperature > Gas Actuated Thermometers > Ordering Temperature Switch Gauges

## Ordering Temperature Switch Gauges

### HOW TO ORDER:

Select the appropriate codes and combine to complete thermometer part number.

**Sample Part Number:** TSG60 03 2 A2 X7 05 SG WI

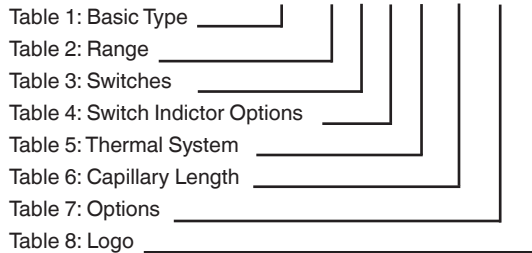


Table 1 - Basic Type	
Code	Description
TI.TSG60	6" back flange temperature switch gauge with conxall connector harness 5" wire length

Table 2 - Range			
Code	Description	Code	Description
01*	-450/50°F	07	0/1000°F
02*	-320/200°F	08	-20/120°
03	0/250°F	09	-20/160°C
04	-50/350°F	10	-20/180°C
05	50/550°F	11	-20/200°C
06	50/750°F		

Table 3 - Switches	
Code	Description
1	One adjustable switch (amphenol connector)
2	Two adjustable switches (amphenol connector)
3	Three adjustable switches (amphenol connector)
4	Four adjustable switches (amphenol connector)

Table 4 - Standard Switch Indicator Options	
Code	Description
A1	Center switch indicator (1 switch)
A2	Right & left switch indicators (2 switches)
A3*	Right, left & center switch indicators (3 switches)
A4*	Right, left, right, left switch indicator (4 switches)

\* For adjacent switches, right and left side indicators will allow for closest proximity of switch settings

Table 5 - Thermal System	
Code	Description
X7	3/8" x 3" bulb w/12" bendable extension, 1/2" NPT one-time adjustable compression fitting
X8	3/8" x 3" bulb w/18" bendable extension, 1/2" NPT one-time adjustable compression fitting

Table 6 - Capillary Length	
Code	Description
XX	Capillary length in feet

Table 7 - Options	
Code	Description
SG	Safety glass
EX	Explosion-proof

Table 8 - Logo	
Code	Description
EH WI	WIKA
EH BL	Blank



Mechanical Temperature > Vapor Actuated Thermometers > TI.V20 / TI.V25 / TI.V35 / TI.V45

## Type TI.V20 / TI.V25 / TI.V35 / TI.V45

WIKA's vapor actuated thermometers are highly accurate and provide remote reading. They are available in U-clamp, front flange or back flange case configurations. WIKAI's vapor actuated thermometers are well suited for refrigeration, solar heating and water treatment applications.



### Standard Features

<b>Case:</b>	Stainless steel
<b>Accuracy:</b>	±1 scale division
<b>Movement:</b>	Heavy duty brass, rotary type
<b>Ring:</b>	Snap-in O-ring
<b>Window:</b>	Glass or polycarbonate
<b>Pointer:</b>	Aluminum, adjustable, black finish
<b>Dial:</b>	Aluminum, white background, black graduations
<b>Bourdon Tube:</b>	Phosphor bronze, soldered to socket and tip
<b>Process Connection:</b>	Plain, union or thermowell
<b>Bulb:</b>	Copper or stainless steel
<b>Capillary:</b>	Copper- plain or with braid armor; stainless steel- plain; stainless steel or with stainless steel interlocking armor

Mechanical Temperature > Vapor Actuated Thermometers > Ordering Vapor Actuated Thermometers

## Ordering Vapor Actuated Thermometers

### HOW TO ORDER:

Select the appropriate codes and combine to complete thermometer part number.

Sample Model No: V25 UB3 5331 05 04 WI

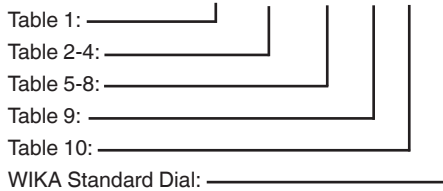


Table 1 - Basic Type	
Code	Description
V20	2"
V25	2½"
V35	3½"
V45	4½"

Table 2 - Case Style				
Code	Case Type	Material	Case Size	Case Conn.
F	Front flange	SS	2", 2½"	B
U	U-clamp	SS	2", 2½"	B
Q	U-clamp	SS	3½"	B
B	Back flange	SS	3½", 4½"	B, L
R	Front flange, semi-flush	SS	3½", 4½"	B

## Ordering Vapor Actuated Thermometers

Code	Description	Case Size	Type
B	Back connection	All	All
L	Lower connection	3½", 4½"	B

Code	Description	Case Size	Case Type
3	Lexan® snap-in lens	All	All
4	Glass lens w/ SS ring	2", 2½"	F, U
5	Glass lens w/ chrome-plated brass ring	3½"	All
7	Glass lens w/ rubber ring	4½"	B, R
8	Glass lens w/ crimped SS ring, water-proof	2", 2½"	U
9	Lexan® threaded lens	2" 2½"	F, U, Q

Code	Bulb Type	Bulb Mat'l	Capillary Mat'l	Cap Protection
1	Plain	Copper	Copper	None
2	Plain	Copper	Copper	Cu. braid
3	Plain	316 SS	316 SS	None
4	Union	Copper	Copper	None
5	Union	Copper	Copper	Cu. braid
8	Union	316 SS	316 SS	Interlock armor
9	Union	316 SS	316 SS	None

**Note: Available combinations for Thermal System (Table 5) and Bulb Selection (Table 6):**

**Plain: 12, 13, 14, 15, 16, 22, 23, 24, 25, 26, 32, 33, 34, 35, 36**

**Union: 41, 42, 43, 44, 45, 51, 52, 53, 54, 55, 81, 82, 83, 84, 85, 91, 92, 93, 94, 95**

**Also must consider Capillary Length (Table 9).**

Use Codes below for Plain Bulb for Non-threaded Process Connection (Codes 1-3 in Table 5)			
Code	Diameter	Length	Max. Sys. Length
2	3/8"	3.4"	25 feet
3	3/8"	4.9"	50 feet
4	3/8"	7.9"	99 feet
5	3/8"	9.4"	99 feet
6	3/8"	2.5"	5 feet
Use Codes below for Union Bulb for Threaded Process Connection (Codes 4-9 in Table 5)			
1	7/16"	2.5"	10 Feet
2	7/16"	3.4"	25 feet
3 <sup>1</sup>	7/16"	5.4"	50 feet
4	7/16"	7.4"	99 feet
5	7/16"	9.4"	99 feet

<sup>1</sup> Required for lagging extension thermowell, see Table 7

Code	Description
1	Union ½" NPT
2	Union ¾" NPT
3	Thermowell ½" NPT
4	Thermowell ¾" NPT
5*	Thermowell ½" NPT with 2" lag ext.
6*	Thermowell ¾" NPT with 2" lag ext.
7	Aluminum air duct flange (union only)
9	Plain bulb (always select "plain bulb" - table 5; codes 1, 2, 3)

\* Lag only available with #3 bulb

Code	Description
0	None (plain bulb only, always select for Codes 1-3 in Table 5)
1	Brass
2	304 SS
3	316 SS
5	Aluminum (air duct flange only)

Code	Description
05	5 feet
10	10 feet
15	15 feet
20	20 feet
30	30 feet
50	50 feet
80	80 feet

**Note:**  
Capillary can be configured to any whole foot, 99' and below. I.E. - 08 = 8' capillary

Code	Description
01	-40/60 °F&°C
02	-40/110 °F&°C
03	-20/100 °F&°C
04	0/150 °F&°C
05	0/180 °F&°C
06	20/220 °F&°C
07	40/240 °F&°C
08	30/300 °F&°C
09	100/350 °F&°C
11	150/450 °F&°C

Code	Description
WI	WIKA
BL	Blank

# INDUSTRIAL GLASS THERMOMETERS

Mechanical Temperature > Industrial Glass Thermometers > TI.61102 / TI.61104, TI.62102 / TI.62104

## Type TI.61102 / TI.61104, TI.62102 / TI.62104

WIKA's 6" industrial glass thermometers are ideal for process piping, HVAC/R applications, diesel engines, compressors and brine lines. This series of thermometers is manufactured in straight and back connected configurations, and come with a standard dual threaded brass socket with both 1/2" and 3/4" NPT connections.


### Standard Features

- Case:** V-shaped gray GE Valox®; wide angle construction
- Glass Front:** Protective glass cover retained within outer edges of case. Spring pressure created by V-scale secures glass against case and prevents rattling. Cover plate completes assembly.
- Tube and Scale:** Blue spirit fill liquid (non-mercury fill). V-shaped scale designed with extra large black numbers. Crosslocked scale holding device prevents loosening or shifting of scale and removes holes and screws that interfere with scale markings or numerals.
- Stem and Socket Assembly:** Brass stem ensures fast response to temperature changes. The standard socket is made of brass and dual threaded for 1/2" and 3/4" NPT.
- Accuracy:** ±1% of full scale range



Mechanical Temperature > Industrial Glass Thermometers > Ordering Industrial Glass Thermometers

## Ordering TI.61102 / TI.61104, TI.62102 / TI.62104 Thermometers

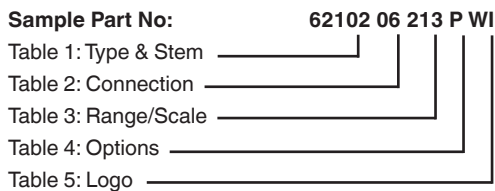

### HOW TO ORDER:

Select the appropriate codes and combine to complete thermometer part number.

### ABBREVIATIONS

N/C - there is no charge for this option.

Code	Description	Stem Length
61102	Straight with 2" stem	1.31"
62102	Back with 2" stem	1.31"
61104	Straight with 4" stem	3.31"
62104	Back with 4" stem	3.31"

Code	Description
00	None - swivel nut connection
06	1/2" and 3/4" brass well

°F Only			°C Only			Dual Scale °F & °C		
Code	°F	Scale Div.	Code	°C	Scale Div.	Code	°F & °C	Scale Div.
201	-40/110	2	115	-40/45	1	001	-40/110 (-45/45 C)	2/1
203	20/120	2	102	-5/50	1	003	20/120 (0/50 C)	2/1
213	20/180	2	118	0/110	2	013	20/180 (0/80 C)	2/2
207	30/240	2	108	0/150	2	007	30/240 (5/110 C)	2/2
208	30/300	5	106	10/200	5	008	30/300 (0/150 C)	5/2
209	50/400	5	n/a	n/a	n/a	009	50/400 (10/200 C)	5/5

Code	Description
P	Plastic window

Code	Description
WI	WIKA

Type	Description
6110206	Straight form with U dimension 1.31"
6210206	Back form with U dimension 1.31"
6110406	Straight form with U dimension 3.31"
6210406	Back form with U dimension 3.31"

Type	Description
6110200	Straight form with U dimension 1.31"
6210200	Back form with U dimension 1.31"
6110400	Straight form with U dimension 3.31"
6210400	Back form with U dimension 3.31"

Mechanical Temperature > Solar Industrial Glass Thermometer > TI.D01

## Type TI.D01

WIKA's TI.D01 solar industrial thermometer offers fast, accurate and easy-to-read temperature indications. This thermometer features a totally adjustable case to permit viewing at any angle, and its bulb and socket are completely interchangeable with standard industrial glass thermometers. The solar industrial thermometer is switchable between Fahrenheit and Celsius, and offers a sensing range of -50 to 300°F and -50 to 150°C, resolved in tenths of a degree, with accuracy to within  $\pm 1\%$  of reading.



### Standard Features

<b>Range:</b>	-50/300°F (-50/150°C)
<b>Accuracy:</b>	$\pm 1\%$ of reading or 1°, whichever is greater
<b>Resolution:</b>	1/10° between -19.9/199.9°F (-28/93°C)
<b>Lux Rating:</b>	10 lux (one foot candle)
<b>Update:</b>	10 seconds
<b>Ambient Operating</b>	
<b>Temperature:</b>	-30/140°F (-35/60°C)
<b>Humidity:</b>	100% maximum
<b>Ambient Temperature</b>	
<b>Error:</b>	None
<b>Case:</b>	High-impact ABS
<b>Display:</b>	7/16" LCD digits, wide ambient temperature range
<b>Sensor:</b>	Glass passivated thermistor

Stock items shown in blue print.

Factory Stock	
Part Number	Description
D010300WI	3½" stem, no thermowell
D010600WI	6" stem, no thermowell
D010301WI	3½" stem, with thermowell
D010601WI	6" stem, with thermowell

Non-Stocked Items	
Part Number	Description
D010304WI	3½" stem, with reversible flange air duct stem
D010604WI	6" stem, with reversible flange air duct stem
D010901WI	9" stem with thermowell

Accessories	
Part Number	Description
TA600-0216	Clear plastic protective cover

Mechanical Temperature > Industrial Glass Thermometers > TI.701/TI.901

## Type TI.701 / TI.901

WIKA's TI.701 (7") and TI.901 (9") industrial glass thermometers offer quick, easy-to-read temperature measurement for tough applications. Glass/mineral reinforced GE Valox® housings and spring mounted windows contribute to impact, shock and vibration resistance. WIKAL industrial glass thermometers are the ideal choice for process piping, HVAC/R applications, diesel engines and compressors.


### Standard Features

<b>Case:</b>	V-shaped case parts are molded of rugged GE Valox® 735 polyester, finished in textured black. Heavy glass window is spring-mounted to prevent rattles.	<b>Adjustable Joint:</b>	Matching GE Valox® joint completely encloses capillary for thermal system protection.
<b>Stem:</b>	To ensure sensitivity, bulb chambers are precision ground aluminum, tapered for a close-tolerance metal-to-metal contact with matching tapered socket. Graphite is used as a conductor between bulb chamber and glass tube.	<b>Tube and Capillary:</b>	Blue spirit-fill liquid (non-mercury fill) standard; magnifying lens tube is silicone shock-mounted to increase service life. Guaranteed accurate to within $\pm 1\%$ of scale range.
<b>Locking Device:</b>	Independent adjustable case lock-nut and angle adjusting screw provide 360° positioning of case and stem.	<b>Scale:</b>	Permanently baked-on, bold black graduations are printed on white-coated aluminum. No mounting screws obscure scale. Scale adjusts through locking device at top of instrument.
		<b>Accuracy:</b>	$\pm 1\%$ of full scale range



## Ordering TI.701 / TI.901 Thermometers

Sample Part No: 901 03 01 004 P WI

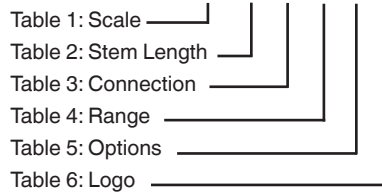

### HOW TO ORDER:

Select the appropriate codes and combine to complete thermometer part number.

Table 1 - Scale	
Code	Description
701	7" scale, swivel-nut connection
901	9" scale, swivel-nut connection
702	7" scale, perforated stem for duct flange
902	9" scale, perforated stem for duct flange

Table 2 - Stem Length	
Code	Description
03	3½" stem
06	6" stem
09	9" stem
12	12" stem

Table 3 - Connection	
Code	Description
00	Swivel-nut connection (no thermowell)
01	¾" NPT brass, thermowell
02	¾" NPT brass with lagging extension
03	¾" NPT brass union hub
04	Duct flange, reversible with or without lagging ext

Table 4 - Single Scale Ranges					
Code	°F	°F Scale Div.	Code	°C	°C Scale Div.
201	-40/110	2	101	-40/50	1
204	0/120	1	104	0/100	1
205	0/160	2	105	0/160	2
206	30/180	2			
207	30/240	2			
208	30/300	5			
*210	50/550	5			

\* Requires aluminum case

Table 4 - Dual Scale Ranges				
Code	°F	°C	°F Scale Div.	°C Scale Div.
001	-40/110	-40/43	2	1
004	0/120	-17/49	1	1
005	0/160	-15/70	2	1
006	30/180	0/80	2	1
007	30/240	0/115	2	1
008	30/300	0/150	5	2
*010	50/550	10/290	5	5

\* Requires aluminum case

Table 5 - Options	
Code	Description
P	7" plastic window
P	9" plastic window
A*	7" or 9" aluminum case*

\* required above 300°F / 160°C

Table 6 - Logo	
Code	Description
WI	WIKA

Factory Stock	
Part Number	Description
9010300004WI	9" scale, 3½" stem, 0/120°F & °C
9010300007WI	9" scale, 3½" stem, 30/240°F & °C
<b>9010300204WI</b>	9" scale, 3½" stem, 0/120°F
<b>9010300205WI</b>	9" scale, 3½" stem, 0/160°F
<b>9010300206WI</b>	9" scale, 3½" stem, 30/180°F
<b>9010300207WI</b>	9" scale, 3½" stem, 30/240°F
9010301204WI	9" scale, 3½" stem, with ¾" NPT brass thermowell 0/120°F
9010301207WI	9" scale, 3½" stem, with ¾" NPT brass thermowell 30/240°F
9010300005WI	9" scale, 3½" stem, 0/160°F & °C
9010600204WI	9" scale, 6" stem, 0/120°F
9010600208WI	9" scale, 6" stem, 30/300°F
9010601208WI	9" scale, 6" stem, with ¾" NPT brass thermowell 30/300°F

Stock items shown in blue print.

# INDUSTRIAL GLASS THERMOMETERS

Mechanical Temperature > Industrial Glass Thermometers > Ordering Industrial Glass Thermometers

## Ordering TI.701 / TI.901 Thermometers

### Custom (Non-Stock) Industrial Glass Thermometers

#### 7" & 9" Scale Industrial Thermometers with Swivel-nut Connection (no Thermowell)

Type	Connection	Range	Logo	Description
70103	00	See chart	WI	7" scale, 3½" stem
70106	00	See chart	WI	7" scale, 6" stem
70109	00	See chart	WI	7" scale, 9" stem
70112	00	See chart	WI	7" scale, 12" stem
90103	00	See chart	WI	9" scale, 3½" stem
90106	00	See chart	WI	9" scale, 6" stem
90109	00	See chart	WI	9" scale, 9" stem
90112	00	See chart	WI	9" scale, 12" stem

#### T-85 Thermowell Conversion Kit

Part Number	Description
TA800-0T85	This conversion kit offers an easy, inexpensive way to install a WIKA bimetal thermometer in a glass industrial thermometer's thermowell. For more information, please consult factory.

#### 7" & 9" Scale Industrial Thermometers with ¾" NPT Brass Thermowell, with or without Lagging Extension

Type	Connection	Range	Logo	Description
70103	01	See chart	WI	7" scale, 3½" stem with thermowell
70106	01 or 02	See chart	WI	7" scale, 6" stem with thermowell (01) or well with lagging extension (02)
70109	01 or 02	See chart	WI	7" scale, 9" stem with thermowell (01) or well with lagging extension (02)
70112	01 or 02	See chart	WI	7" scale, 12" stem with thermowell (01) or well with lagging extension (02)
90103	01	See chart	WI	9" scale, 3½" stem with thermowell
90106	01 or 02	See chart	WI	9" scale, 6" stem with thermowell (01) or well with lagging extension (02)
90109	01 or 02	See chart	WI	9" scale, 9" stem with thermowell (01) or well with lagging extension (02)
90112	01 or 02	See chart	WI	9" scale, 12" stem with thermowell (01) or well with lagging extension (02)

#### 7" & 9" Scale Industrial Thermometers Complete with Flange

Type	Connection	Range	Logo	Description
70203	04	See chart	WI	7" scale, 3½" stem with reversible duct flange (with or without lagging ext.)
70206	04	See chart	WI	7" scale, 6" stem with reversible duct flange (with or without lagging ext.)
70209	04	See chart	WI	7" scale, 9" stem with reversible duct flange (with or without lagging ext.)
70212	04	See chart	WI	7" scale, 12" stem with reversible duct flange (with or without lagging ext.)
90203	04	See chart	WI	9" scale, 3½" stem with reversible duct flange (with or without lagging ext.)
90206	04	See chart	WI	9" scale, 6" stem with reversible duct flange (with or without lagging ext.)
90209	04	See chart	WI	9" scale, 9" stem with reversible duct flange (with or without lagging ext.)
90212	04	See chart	WI	9" scale, 12" stem with reversible duct flange (with or without lagging ext.)

#### Single Scale Ranges

Code	°F	°F Scale Div.	Code	°C	°C Scale Div.
201	-40/110	2	101	-40/50	1
204	0/120	1	104	0/100	1
205	0/160	2	105	0/160	2
206	30/180	2			
207	30/240	2			
208	30/300	5			
*210	50/550	5			

\* Requires aluminum case

#### Dual Scale Ranges

Code	°F	°C	°F Scale Div.	°C Scale Div.
001	-40/110	-40/43	2	1
004	0/120	-17/49	1	1
005	0/160	-15/70	2	1
006	30/180	0/80	2	1
007	30/240	0/115	2	1
008	30/300	0/150	5	2
*010	50/550	10/290	5	5

\* Requires aluminum case

## Type TW.FL / TW10 Flanged, TW.TH / TW15 Threaded, TW.SW / TW20 Socket Weld, TW.WI / TW25 Weld-in, TW.SC / TW30 Sanitary

Thermowells for temperature instruments are recommended for all process systems where pressure, velocity or viscous, abrasive and corrosive materials are present individually or in combination. A properly selected thermowell protects the temperature instrument from possible damage resulting from these process variables. Furthermore, a thermowell permits removal of the temperature instrument for replacement, repair or testing without affecting the process media or the system.



### Standard Features

<b>Process Connections:</b>	Threaded, flanged, sanitary, socket, weld, weld-in
<b>Instrument Connection:</b>	½" NPSM standard (National Pipe Standard Mechanical); a straight pipe thread for mechanical joints)
<b>Shank Configurations:</b>	Reduced, straight, tapered
<b>Bore Diameter:</b>	.260", .385"
<b>Materials:</b>	Brass, AISI 304, AISI 316
<b>Surface Finish:</b>	Brass: 60-100 Ra; AISI 304 & AISI 316: 60-100 Ra sanitary (AISI 304 & AISI 316): 16-20 Ra

## Thermowell Terminology

**Process Connection:** External means to connect thermowell to process piping system. Wells can be threaded, bolted (to matching flange), clamped or welded in place.

**Instrument Connection:** Internal threads to connect temperature instrument to thermowell.

**U Dimension:** Length of well inserted into the piping system. Measured from the base of the process connection to the end tip of well.

**T Dimension:** Also called lagging extension. Extends length between the instrument and process connections to accommodate vessel or piping insulation. Standard length is 3" (2" for a well with a 2½" U dimension).

**S Dimension:** Instrument insertion length into well.

**Bore Diameter:** Dimension of internal bore to match the diameter of the instrument stem/bulb inserted into the well. The .260" and .385" bore sizes fit instrument stem/bulb diameters of ¼" and ⅜" respectively. Bore length equals S dimension.


**Root Diameter:** Diameter of well shank below process connection. This dimension varies with process connection and/or shank design.

**Tip Diameter:** Diameter of well shank at the end tip of well. This dimension may vary with process connection and/or shank design.


**Reduced Shank:** Also called reduced tip. The shank O.D. is reduced over the last 2½" of the U dimension from the standard root diameter to a ½" O.D. The stepped shank is available with a .260" bore size only.

**Straight Shank:** Shank O.D. is the same from the root diameter to the tip diameter. The straight shank is generally used with a .385" bore size but a .260" bore size is available.


**Tapered Shank:** Shank O.D. is gradually reduced from the root diameter to the tip diameter. Available with a .260" or .385" bore size. The tapered shank is recommended for heavy duty applications characterized by high vibration, pressure, temperature and/or velocity.

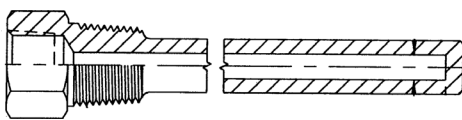


Threaded Straight Configuration

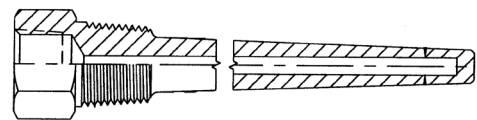


Threaded Tapered Configuration

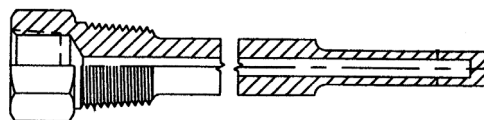

Threaded Reduced (Stepped) Configuration



Flanged Tapered Configuration

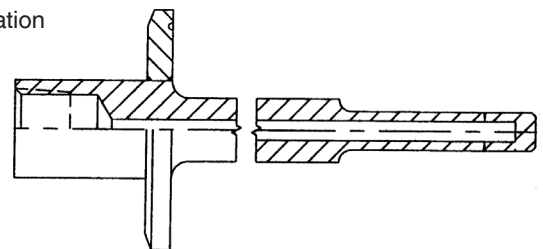

Sanitary Reduced Configuration



## Thermowells For Bimetal & Gas Actuated Thermometers

CODING EXAMPLES									
Type	Part Number	Process Connection	Bore/Type	Lag	Shank Design	U Dim.	Material	Rating	Facing
Threaded	75-TH2R-045-CC	¾" NPT	.260/threaded	None	Stepped	4½"	304SS		
Threaded	75-TH2LT-055-SS-T5	¾" NPT	.260/threaded	5" Lag	Tapered shank	5½"	316SS		
Flanged	15-FL2T-070-SS-150RF	1½" flanged	.260/flanged	None	Tapered shank	7"	316SS	150#	RF
Sanitary	10-SC2R-045-SS	1" sanitary	.260/sanitary	None	Stepped shank	4½"	316SS		
Socket weld	75-SW2R-045-CC	¾" NPT	.260/skt weld	None	Stepped	4½"	304SS		

WIKA THERMOWELL PRODUCT CODING EXPLANATION								
Process Connection	Type / Bore Dia.	Lag	Shank Design	Standard U Dimensions (No Lag)		For Stem Length	Standard Material	Cap & Chain
				Type FL	All Other Types			
50 = ½"	TH2 = Threaded/.260	Blank=No lag	R = Reduced	N/A	*015 = 1½"	2½"	BR=Brass	2= ST.ST.
75 = ¾"	TH3 = Threaded/.385	L=Standard lag	S = Straight	020 = 2"	025 = 2½"	4"	CC=304 SS	
10 = 1"	FL2 = Flanged/.260		T = Tapered	040 = 4"	045 = 4½"	6"	SS=316 SS	
12 = 1¼"	FL3 = Flanged/.385			070 = 7"	075 = 7½"	9"	CS=Carbon steel	
15 = 1½"	SC2 = Sanitary/.260			100 = 10"	105 = 10½"	12"	MO=Monel®	
20 = 2"	SC3 = Sanitary/.385			130 = 13"	135 = 13½"	15"	CP=Carp.20	
	SW2 = Socket weld/.260			160 = 16"	165 = 16½"	18"	IN=Inconel® 600	
	SW3 = Socket weld/.385			220 = 22"	225 = 22½"	24"	NI=Nickel	
				Standard U with lag (T)			HB=Hastelloy® B	
				Type FL	All Other Types		HC=Hastelloy® C	
				020 = 2"	025 = 2½"		TA=Tantalum	
				(T=2")	(T=2")	6"	TI=Titanium	
				040 = 4"	045 = 4½"		TC=Teflon® coated	
				(T=3")	(T=3")	9"	Other material, consult factory for pricing.	
				070 = 7"	075 = 7.½"			
				(T=3")	(T=3")	12"		
				100 = 10"	105 = 10½"			
				(T=3")	(T=3")	15"		
				130 = 13"	135 = 13½"			
				(T=3")	(T=3")	18"		
				190 = 19"	195 = 19½"			
				(T=3")	(T=3")	24"		











For Flanged Well, Specify Rating & Facing	
Rating	Facing
150#	
300#	FF=Flat Face flange
600#	RF=Raised Face flange
900#	RTJ=Ring Joint flange
1500#	

\*Note: For ½" NPT process connection the "U" dimension becomes 1" to accommodate ½" NPSM female thread. Order as \*010", i.e. 50TH2R010CC.

Threaded Thermowell Factory Stock				
Part Number				
75TH2R015BR	75TH2R015CC	75TH2R015SS	75TH2R025BR	75TH2R025CC
75TH2R025SS	75TH2LR025SS	75TH2R045CC	75TH2R045SS	75TH2R045BR
75TH2R045CC	75TH2LR045SS	75TH2R075SS	50TH2R010CC	50TH2R010SS
50TH2R025BR	50TH2R025CC	50TH2R025SS		

Stock items shown in blue print.

# Threaded Configuration

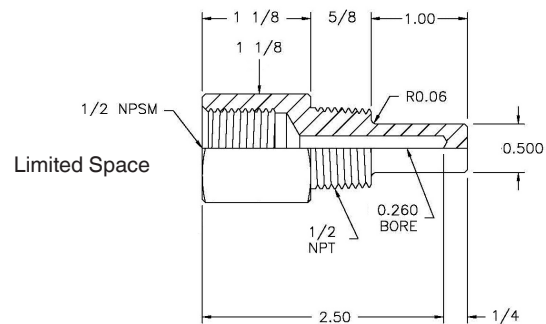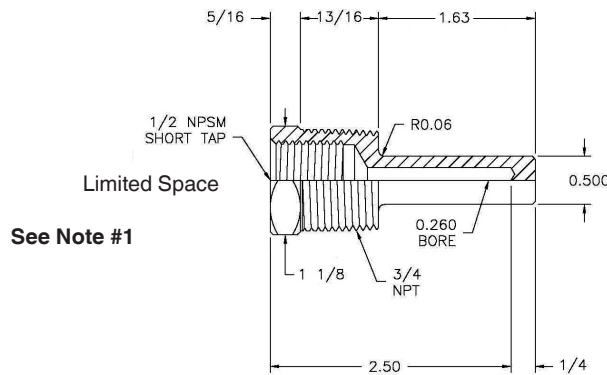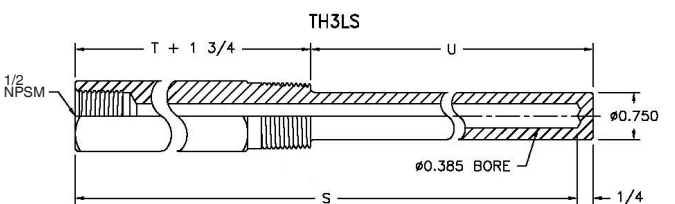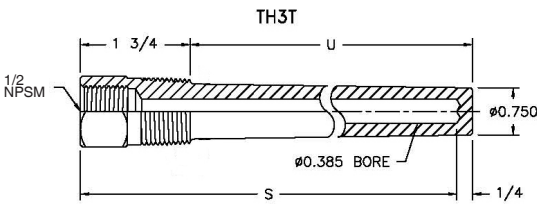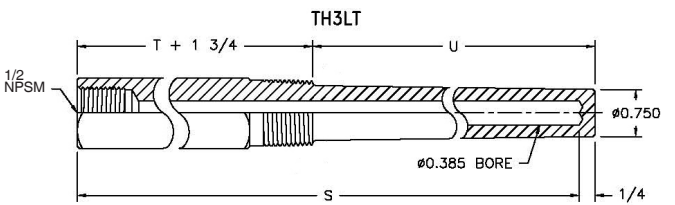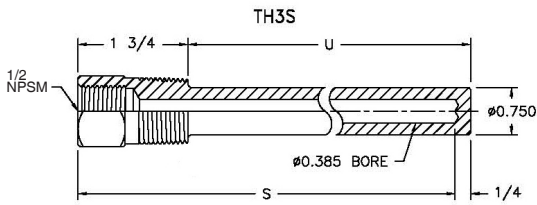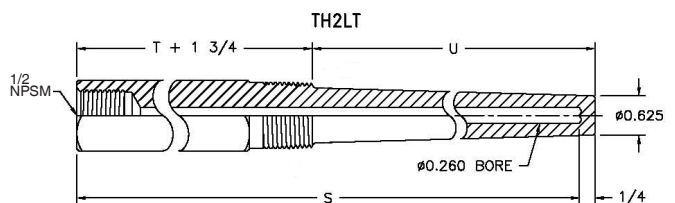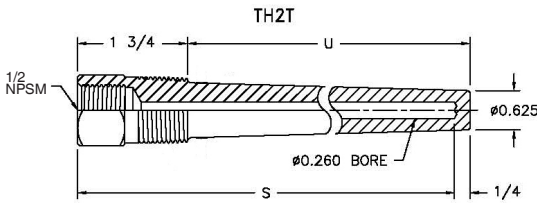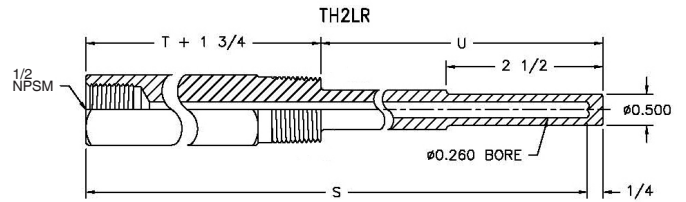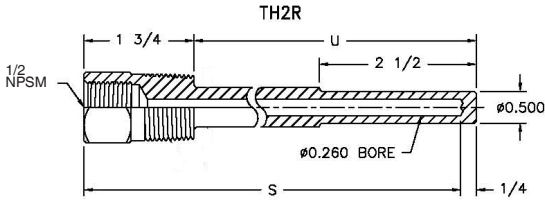


**Notes:**

1. Normal U dimension on limited space well is 1 5/8" for 3/4" NPT and 1" NPT process connection. (For 1/2" NPT process connection, U dimension becomes 1" to accommodate 1/2" NPSM female thread). Order as "010", i.e. 50TH2R010CC.

Mechanical Temperature > Thermowells > Flanged Configuration

# Flanged Configuration

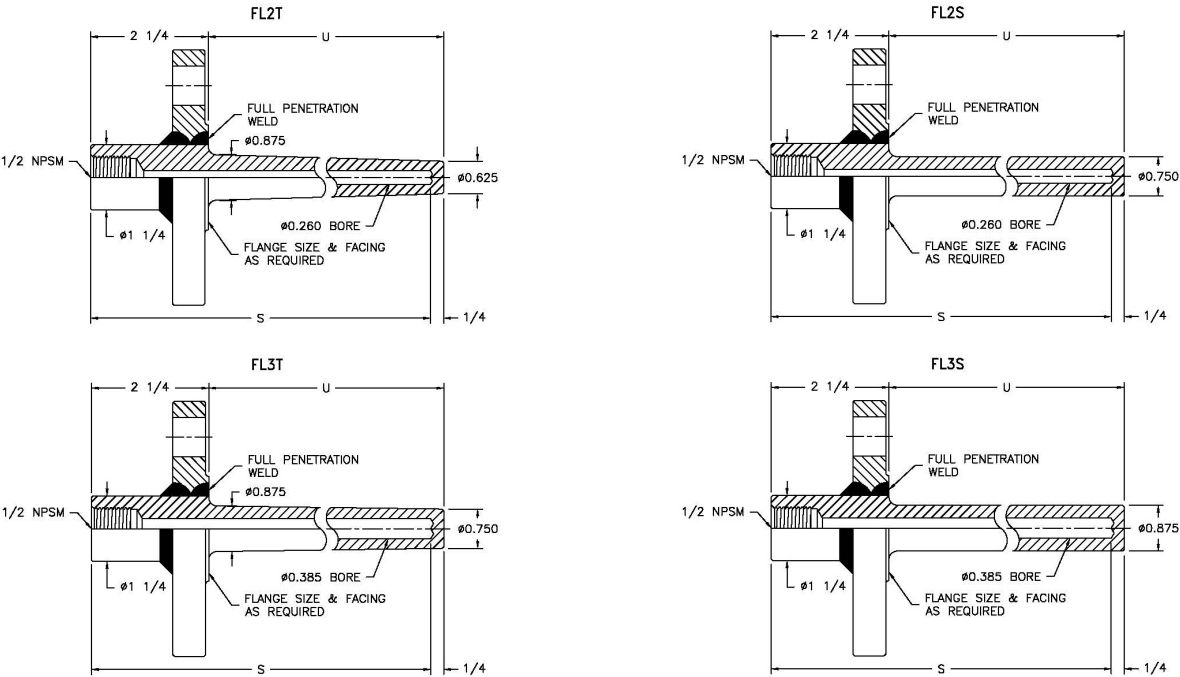


Flange Rating	Minimum Head Lengths					
	Flange Size					
	1"	1-1/2"	2"	2-1/2"	3"	4"
150#	2.25" (57.2)	2.25" (57.2)	2.25" (57.2)	2.25" (57.2)	2.25" (57.2)	2.25" (57.2)
300#	2.25" (57.2)	2.25" (57.2)	2.25" (57.2)	2.25" (57.2)	3.25" (82.6)	3.25" (82.6)
400#	2.25" (57.2)	2.25" (57.2)	3.25" (82.6)	3.25" (82.6)	3.25" (82.6)	3.25" (82.6)
600#	2.25" (57.2)	2.25" (57.2)	3.25" (82.6)	3.25" (82.6)	3.25" (82.6)	3.25" (82.6)
900#	3.25" (82.6)	3.25" (82.6)	3.25" (82.6)	3.25" (82.6)	3.25" (82.6)	3.25" (82.6)
1500#	3.25" (82.6)	3.25" (82.6)	3.25" (82.6)	3.25" (82.6)	3.25" (82.6)	3.25" (82.6)
2500#	3.25" (82.6)	3.25" (82.6)	4.25" (108.0)	4.25" (108.0)	4.25" (108.0)	4.25" (108.0)

**HOW TO ORDER**  
 Specify flange size, rating and facing, thermowell U dim., bore dia. and material.  
 Raised face flange supplied as standard ANSI serrated. Specify 125 RMS smooth face if required at no extra charge.



Mechanical Temperature > Thermowells > Socket Weld Configuration

# Socket Weld Configuration

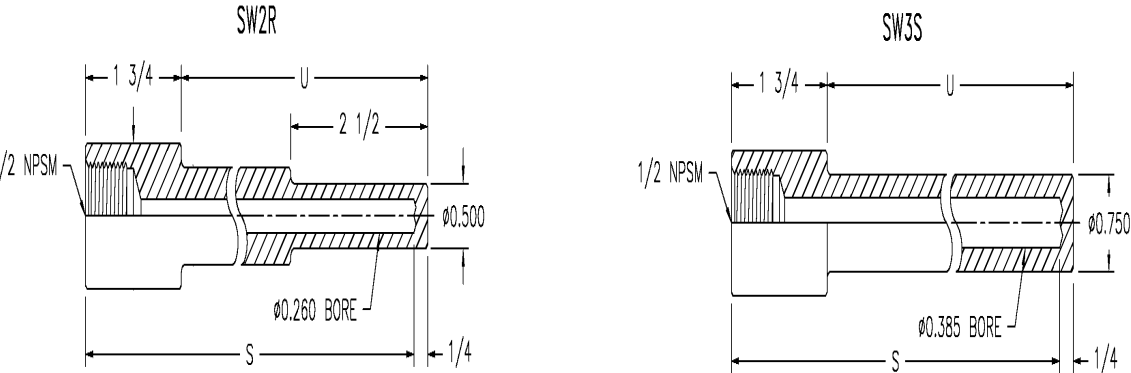

MECHANICAL TEMPERATURE

## Sanitary Configuration

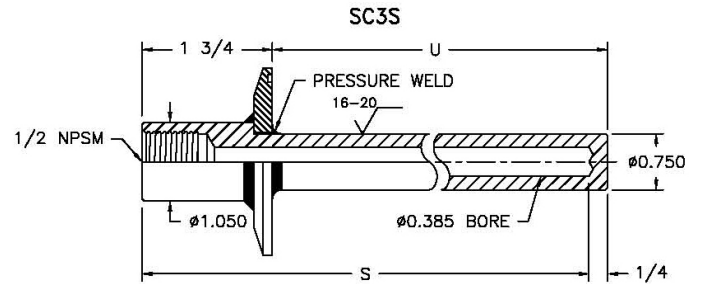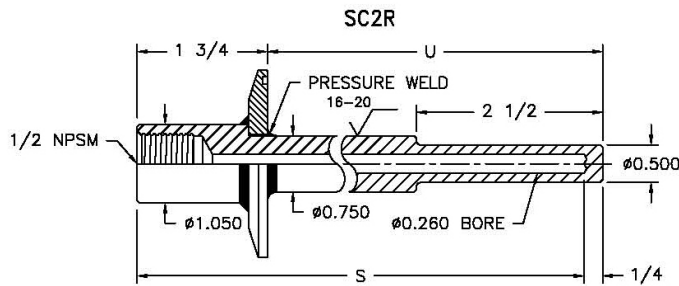

**Notes:**

1. Meets USDA and 3A Sanitary Standard 74-03
2. Available with 1", 1½", 2" and 3" solid end caps
3. Special designs available upon request
4. Standard finish AISI 304 and AISI 316, 16-20 Ra

Note: Minimum stem length is 4"

### Sanitary Thermowells - Stepped or Straight Shank

Type SC2 (.260 Bore) & SC3 (.385) bore, stepped or straight shank, with or without lag

Size	Type	No Lag U Dim	With Lag		S Dim
			U Dim	T Dim	
1" or 1½"	SC2R	2½	--	--	4
	SC2LR	4½	2½"	2	6
	SC3S				
	SC3LS	7½	4½"	3	9

Size	Type	No Lag U Dim	With Lag		S Dim
			U Dim	T Dim	
2"	SC2R	2½	--	--	4
	SC2LR	4½	2½"	2	6
	SC3S				
	SC3LS	7½	4½"	3	9

### Sanitary Thermowells - Tapered Shank

Type SC2 (.260 Bore) & SC3 (.385) bore, tapered shank, with or without lag

Size	Type	No Lag U Dim	With Lag		S Dim
			U Dim	T Dim	
1" or 1½"	SC2T	2½	--	--	4
	SC2LT	4½	2½"	2	6
	SC3T				
	SC3LT	7½	4½"	3	9


### Accessories

Description	Part Number	Code
SS cap & chain		Code 2
Stamping on well		--
5.3 oz. tube heat transfer compound	2256045	--
Paper tag		--

Size	Type	No Lag U Dim	With Lag		S Dim
			U Dim	T Dim	
2"	SC2T	2½	--	--	4
	SC2LT	4½	2½"	2	6
	SC3T				
	SC3LT	7½	4½"	3	9

Note: Sanitary thermowells are polished to 16-20 Ra per 3A Sanitary Standards

## Thermowells for Industrial Glass Thermometers

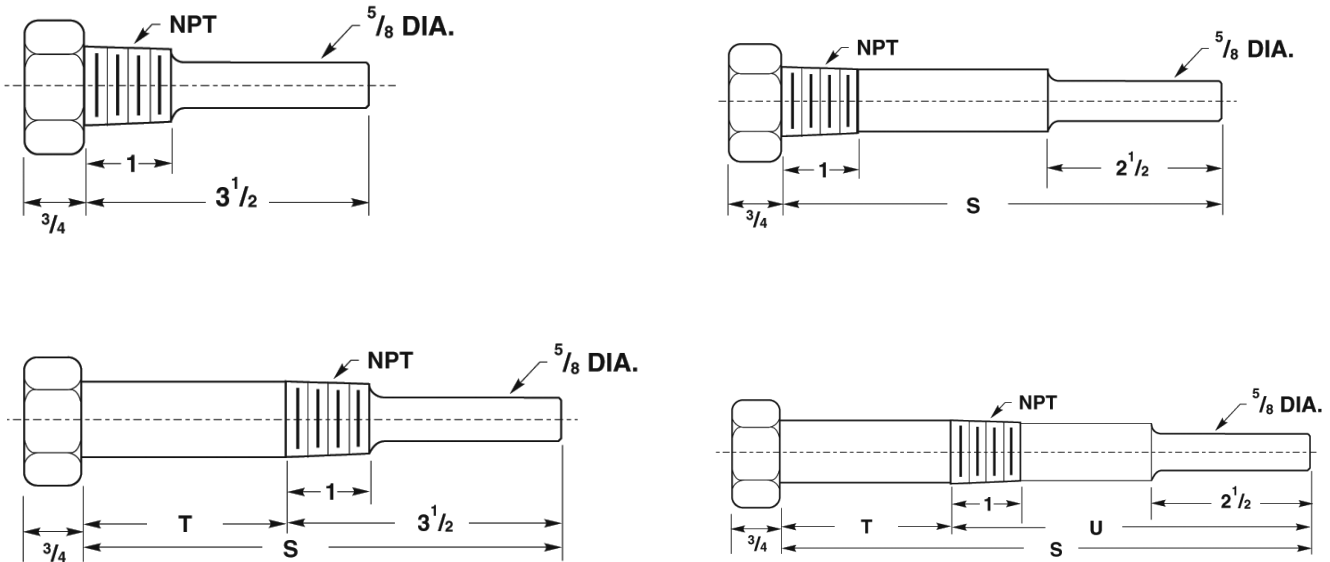

### Thermowell Product Coding Explanation

Process Connection	Type / Bore Dia.	Lag	Shank Design	Nominal Bulb Length	For Stem Length	Standard Material	Cap & Chain
75 = 3/4" 10 = 1"	TH5 = Threaded / 0.435 min. dia.	Blank = No lag L=Standard lag	R = Stepped	035 = 3 1/2" 060 = 6" 090 = 9"	3 1/2" 6" 9"	BR=Brass CC=304 SS SS = 316 SS	1=Brass 2=St. Steel

### WIKA Industrial Thermowell Coding Explanation

Type TH5 stepped shank, with or without lag

Size	Type	No lag	with lag		"S"
			U Dim.	T Dim	
3/4" or 1"	TH5R TH5LR	2-9/16"	-----	-----	3 1/2"
		5-1/16"	2-9/16"	2 1/2"	6"
		8-1/16"	5-1/16"	3"	9"
		11-1/16"	8-1/16"	3"	12"

### Factory Stock

#### Threaded Thermowell for Industrial Glass Thermometers

Part Number
75TH5R035BR
75TH5R060BR
75TH5LR035BR